


## Overview

HP recommends Windows Vista®  
Business

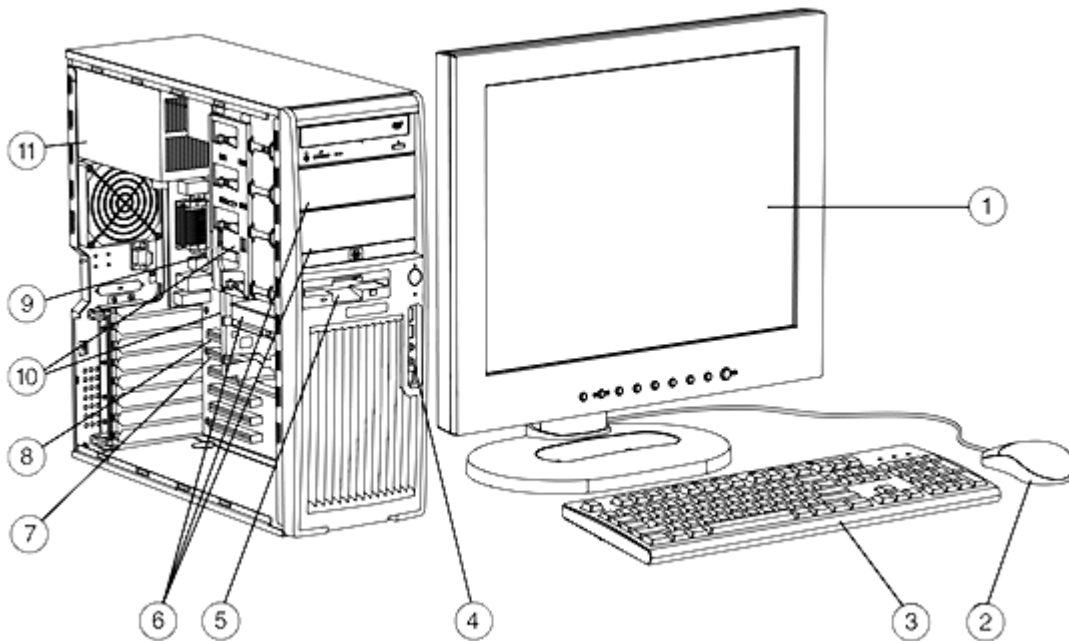

1. Monitor (sold separately)
2. 2-Button Scroll Mouse
3. Standard Keyboard
4. Front IO: 2 USB 2.0, IEEE-1394 (requires optional PCI card to enable), headphone and microphone
5. One 3.5" external bay for optional diskette drive or other 3.5" device
6. Three 5.25" external bays (3rd external is not full depth), and two 3.5" internal bays
7. 3 PCI slots, 1 PCI Express x1 slot, 1 PCI Express x16 slot (with x4 functionality)
8. 1 PCI Express x16 Graphics slot
9. Rear IO: 5 USB 2.0, 1 standard serial port, 1 optional serial port, 1 parallel port, PS/2 keyboard, PS/2 mouse, RJ-45, audio in, audio out, mic in
10. 1 USB 2.0 internal port
11. Intel® Core™ 2 Duo processor or Intel Pentium® D processor; both processors are EM64T capable
12. 460 watt (continuous) power supply  
Optional 475W 80 PLUS power supply also available.

## Overview

### At A Glance

- Choice of Operating Systems:
  - Genuine Microsoft Vista™ Business 32 or 64\*
  - Genuine Microsoft Windows Vista™ Business 32-bit downgrade to Microsoft Windows XP Professional
  - Genuine Microsoft Windows Vista™ Business 64-bit downgrade to Microsoft Windows XP Professional x64
  - Genuine Microsoft Windows XP Professional (32-Bit)
  - Genuine Microsoft Windows XP Professional x64 Edition
  - Preloaded: Red Hat Enterprise Linux® WS 4 (Update 4 or later) (32- or 64-bit version)
  - HP Linux Installer Kit (see <http://www.hp.com/workstations/software/linux>)
  - Red Hat Enterprise Linux WS 4 (Update 4 or later) (32- or 64-bit version)
  - Red Hat Enterprise Linux WS 3 (Update 8) (32 or 64 bit version)
  - For detailed OS/hardware support information for Linux, see: [http://www.hp.com/support/linux\\_hardware\\_matrix](http://www.hp.com/support/linux_hardware_matrix)
- Intel Core™ 2 Extreme QX6700 processor with Intel® 64 Architecture
  - Quad-Core
  - 1066 MHz Front Side Bus
  - 8 MB L2 cache (2x4 MB shared)
  - Virtualization Technology
- Intel Core™ 2 Duo processor with Intel® 64 Architecture
  - Dual-Core
  - 800 or 1066 MHz Front Side Bus
  - 2 MB or 4 MB shared L2 cache
  - Virtualization Technology
- Intel 975X chipset
- Integrated HP Gbit LAN by Broadcom
- Convertible and tool-less minitower chassis
- 3 PCI Express slots/3 PCI slots
- Dual channel DDR2 memory at 667 MHz
- Four channel SATA Controller with RAID\*\* (Factory integrated RAID is Microsoft Windows only)
- 80 PLUS Power supply option and ENERGY STAR 4.0 configuration options available
- SATA optical drives option
- Realtek integrated high definition audio with internal speaker
- Pre-loaded Manageability tools (Microsoft Windows only)
- Protected by HP Services, including a 3-3-3 standard warranty. Terms and conditions vary by country. Certain restrictions and exclusions apply.

\* Not all Windows Vista features are available for use on all Windows Vista Capable PCs. All Windows Vista Capable PCs will run the core experiences of Windows Vista, such as innovations in organizing and finding information, security, and reliability. Some features available in premium editions of Windows Vista -- like the new Windows Aero™ user interface -- require advanced or additional hardware. Check <http://www.windowsvista.com/getready> for details.

\*\* Hardware RAID is not supported on Linux systems. The Linux kernel, with built-in software RAID, provides excellent, functionality and performance. It is a good alternative to hardware-based RAID. Please visit <http://h20000.www2.hp.com/bc/docs/support/SupportManual/c00060684/c00060684.pdf> for RAID capabilities with Linux.

## Standard Features - Custom Components

<b>Processor and Speed</b> – One of the following	<b>All processors feature Intel® 64 Architecture and Intel Virtualization Technology</b> Intel Core 2 Extreme QX6700 processor / 2.66 GHz, 4 MB x 2, 1066 FSB, Dual-Core, Intel Virtualization Technology Intel Core 2 Duo E6700 Processor/ 2.67 GHz, 4 MB L2, 1066 MHz FSB, Dual-Core, Intel Virtualization Technology Intel Core 2 Duo E6600 Processor/ 2.40 GHz, 4 MB L2, 1066 MHz FSB, Dual-Core, Intel Virtualization Technology Intel Core 2 Duo E6420 Processor/ 2.13 GHz, 4 MB L2, 1066 MHz FSB, Dual-Core, Intel Virtualization Technology Intel Core 2 Duo E6320 Processor/ 1.86 GHz, 4 MB L2, 1066 MHz FSB, Dual-Core, Intel Virtualization Technology Intel Core 2 Duo E6300 Processor/ 1.86 GHz, 2 MB L2, 1066 MHz FSB, Dual-Core , Intel Virtualization Technology Intel Core 2 Duo E4300 Processor/ 1.80 GHz, 2 MB L2, 800 MHz FSB, Dual-Core Intel Core 2 Duo E2160 Processor/ 1.80 GHz, 1 MB L2, 800 MHz FSB, Dual-Core
--	--

### NOTE:

Intel processor numbers are not a measurement of higher performance. Processor numbers differentiate features within each processor family, not across different processor families. See [http://www.intel.com/products/processor\\_number/](http://www.intel.com/products/processor_number/) for details. Intel® 64 Architecture requires a computer system with a processor, chipset, BIOS, operating system, device drivers, and applications enabled for Intel® 64 Architecture. Processor will not operate (including 32-bit operation) without an Intel® 64 Architecture-enabled BIOS. Performance will vary depending on your hardware and software configurations. See <http://www.intel.com/technology/64bitextensions> for more information including details on which processors support Intel® 64 Architecture or consult with your system vendor for more information. Intel Virtualization Technology requires a computer system with a processor, chipset, BIOS, virtual machine monitor (VMM) and applications enabled for virtualization technology. Functionality, performance or other virtualization technology benefits will vary depending on hardware and software configurations. Virtualization technology-enabled BIOS and VMM applications are currently in development.

---

<b>Operating System</b> – One of the following	Microsoft Vista™ Business 32 or 64 Genuine Windows XP Professional SP2 (32-Bit) Genuine Windows XP Professional x64 Edition (64-Bit) Microsoft Windows Vista 32-bit downgrade to Microsoft Windows XP Professional Microsoft Windows Vista 64-bit downgrade to Microsoft Windows XP Professional x64 Edition Preloaded: Red Hat Enterprise Linux WS 4 (Update 4 or later) (32- or 64-bit version) HP Linux Installer Kit (see <a href="http://www.hp.com/workstations/software/linux">http://www.hp.com/workstations/software/linux</a> ): Red Hat Enterprise Linux WS 4 (Update 4 or later) (32- or 64-bit version) Red Hat Enterprise Linux WS 3 (Update 8) (32 or 64 bit version) For detailed OS/hardware support information for Linux, see: <a href="http://www.hp.com/support/linux_hardware_matrix">http://www.hp.com/support/linux_hardware_matrix</a>
---	---

---

### Standard Features - Custom Components

Energy conservation	Windows Vista	Windows XP	Red Hat Linux
ENERGY STAR 4.0 configurations (includes 80 PLUS power supply)	32-Bit	32-Bit	Not supported
80 PLUS power supply option only	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4

1-3 Hard Disk Drives – Up to 3 of the following SATA drives, or 3 of the following SAS drives	Windows Vista	Windows XP	Red Hat Linux
<b>SATA Hard Drives</b>			
80 GB 7200 rpm SATA 3.0Gb/s drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
160 GB 7200 rpm SATA 3.0Gb/s NCQ	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
250 GB 7200 rpm SATA 3.0Gb/s NCQ	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
500 GB 7200 rpm SATA 3.0Gb/s NCQ	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
750 GB 7200 rpm SATA 3.0Gb/s NCQ	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
80 GB 10K rpm SATA 1.5Gb/s NCQ	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
160 GB 10K rpm SATA 1.5Gb/s NCQ	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
<b>Serial Attached SCSI (SAS) Hard Drives (SAS controller required)</b>			
146 GB 10K rpm SAS 3.0Gb/s	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
300 GB 10K rpm SAS 3.0Gb/s	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
73 GB 15K rpm SAS 3.0Gb/s	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
146 GB 15K rpm SAS 3.0Gb/s	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
300 GB 15K rpm SAS 3.0Gb/s	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4

4th Hard Disk Drive – One of the following (not supported with 2nd optical drive)	SATA 3Gb/s Hard Drives	Windows Vista	Windows XP	Red Hat Linux
	160 GB 7200 rpm SATA 3.0Gb/s NCQ drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
	500 GB 7200 rpm SATA 3.0Gb/s NCQ drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
	750 GB 7200 rpm SATA 3.0Gb/s NCQ	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
	<b>Serial Attached SCSI (SAS) Drives (SAS controller required)</b>			
	300 GB 10K rpm SAS 3.0Gb/s	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
	300 GB 15K rpm SAS 3.0Gb/s drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4

## Standard Features - Custom Components

Factory Integrated RAID (on motherboard for SATA drives. All drives must be identical in type and capacity)		Windows Vista	Windows XP	Red Hat Linux
RAID 0 Configuration – Striped Array (SATA or SAS) (HD drive 3 cannot be 500 GB SATA. Not supported with 750 GB SATA)		32-Bit, 64-Bit	32-Bit, 64-Bit	Not supported
RAID 1 Configuration – Mirrored Array (SATA or SAS, 2 drive max.)		32-Bit, 64-Bit	32-Bit, 64-Bit	Not supported
RAID 5 Configuration – Parity Array (SAS available now, SATA available later in 2007): Only 80 GB or 160 GB HD drives allowed in SATA configuration. If SAS, 8 port controller required.		Not supported	32-Bit, 64-Bit	Not supported
RAID 10 Configuration – Striped/Mirrored Array (SAS available now, SATA available later in 2007): 4 HD drives required)		Not supported	32-Bit, 64-Bit	Not supported
<b>NOTE:</b> Requires identical hard drives (speeds, capacity, interface). (HW RAID functionality not supported by Linux)				

Drive controllers		Windows Vista	Windows XP	Red Hat Linux
Integrated 4-channel SATA 3.0 Gb/s controller with RAID* 0, 1, 10, 5 and NCQ		32-Bit, 64-Bit, RAID supported but not factory integrated	32-Bit, 64-Bit	WS 3 & WS 4 (HW RAID functionality not supported by Linux)
Optional 4-port SAS LSI 3041E 3.0Gb RAID* Card**		32-Bit, 64-Bit, RAID supported but not factory integrated	32-Bit, 64-Bit	WS 3 & WS 4 (HW RAID functionality not supported by Linux)
LSI 8344ELP 8-port SAS HW RAID* Card***		Not supported	32-Bit, 64-Bit	
*Hardware RAID is not supported on Linux systems. The Linux kernel, with built-in software RAID, provides excellent functionality and performance. It is a good alternative to hardware-based RAID. Please visit <a href="http://h20000.www2.hp.com/bc/docs/support/SupportManual/c00060684/c00060684.pdf">http://h20000.www2.hp.com/bc/docs/support/SupportManual/c00060684/c00060684.pdf</a> for RAID capabilities with Linux.				
** Not supported when HD drive 1 is SATA				
*** Supported only with RAID5. Not supported when HD drive 1 is SATA				

## Standard Features - Custom Components

Memory – One of the following		Windows Vista	Windows XP	Red Hat Linux
	<b>PC2-5300E ECC Unbuffered RAM DIMMs</b>			
	HP 512 MB (2 x 256 MB) PC2-5300E DDR2-667 ECC	32-Bit	32-Bit, 64-Bit	WS 3, WS 4
	HP 1 GB (2 x 512 MB) PC2-5300E DDR2-667 ECC	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
	HP 1.5 GB (2 x 256 MB + 2 x 512 MB) PC2-5300E DDR2-667 ECC	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
	HP 2 GB (4 x 512 MB) PC2-5300E DDR2-667 ECC	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
	HP 2 GB (2 x 1 GB) PC2-5300E DDR2-667 ECC	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
	HP 3 GB (2 x 512 + 2 x 1 GB) PC2-5300E DDR2-667 ECC	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
	HP 4 GB (2 x 2 GB) PC2-5300E DDR2-667 ECC	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
	HP 4 GB (4 x 1 GB) PC2-5300E DDR2-667 ECC	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
	HP 6 GB (2 x 1 GB + 2 x 2 GB) PC2-5300E DDR2-667 ECC	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
	HP 8 GB (4 x 2 GB) PC2-5300E DDR2-667 ECC	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
	<b>PC2-5300U Non-ECC Unbuffered RAM DIMMs</b>			
	HP 256 MB (1 x 256 MB) PC2-5300U DDR2-667 non-ECC	Not supported	32-Bit, 64-Bit	Not supported
	HP 512 MB (2 x 256 MB) PC2-5300U DDR2-667 non-ECC	32-Bit	32-Bit, 64-Bit	WS 3, WS 4
	HP 1 GB (2 x 512 MB) PC2-5300U DDR2-667 non-ECC	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
	HP 2 GB (4 x 512 MB) PC2-5300U DDR2-667 non-ECC	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4

**NOTE:** Do not mix ECC and non-ECC memory. The system will not boot if ECC and non-ECC DIMMs are mixed. Only unbuffered DDR2 DIMMs are supported. All DIMMs must be either x8 or x16 width.

### Standard Features - Custom Components

Removable Storage	Windows Vista	Windows XP	Red Hat Linux
No Floppy Drive option	N/A	N/A	N/A
1.44 MB Diskette Drive*	TBD	32-Bit, 64-Bit	WS 3, WS 4
16X DVD-ROM with +R Read	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
SATA 48X CD-RW/DVD-ROM Combo Drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
SATA SuperMulti DVD +/-RW LightScribe Drive**	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4

\* Not supported as a 2nd drive option.

\*\* LightScribe creates a grayscale image similar to black and white photography. LightScribe media required and sold separately. Double-layer discs can store more data than single layer discs. However, double-layer discs burned with this drive may not be compatible with many existing single-layer DVD drives and players. LightScribe software works with Microsoft Windows XP and Vista only.

Input Devices	Windows Vista	Windows XP	Red Hat Linux
<b>Keyboard*</b> – One of the following			
No Keyboard option	N/A	N/A	N/A
PS/2 Standard Keyboard	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
USB Standard Keyboard	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
<b>Mouse</b> – One of the following			
No Mouse option	N/A	N/A	N/A
PS/2 2-Button Scroll Mouse	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
USB 2-Button Optical Scroll Mouse	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
USB 3-Button Optical Mouse	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4

\* Mixing USB and PS/2 not supported in Linux - Both Mouse and Keyboard must be either PS/2 or USB.

Audio	Windows Vista	Windows XP	Red Hat Linux
Integrated High Definition audio with internal speaker	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
Sound Blaster X-Fi XtremeMusic Audio Card	Not supported	32-Bit	Not Supported

NIC (Network Interface Controller)	Windows Vista	Windows XP	Red Hat Linux
Integrated PCIe Broadcom 5755 Netxtreme Gigabit Ethernet NIC	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4

### Standard Features - Custom Components

PCI Express Graphics – Up to two of the following*	HP No Graphics option	Windows Vista	Windows XP	Red Hat Linux
		N/A	N/A	N/A
<b>Professional 2D</b>				
	NVIDIA Quadro NVS 285 PCIe (128 MB)*	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
	NVIDIA Quadro NVS 440 PCIe (256 MB)*	32-Bit, 64-Bit	32-Bit, 64-Bit	Not supported
<b>Entry 3D</b>				
	NVIDIA Quadro FX 560 PCIe (128 MB)	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
<b>Mid-range 3D</b>				
	NVIDIA Quadro FX 1500 PCIe (256 MB)*	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
	ATI FireGL V3350 PCIe (256 MB)	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
<b>High-end 3D</b>				
	NVIDIA Quadro FX 3500 PCIe (256 MB)	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
	ATI FireGL V7200 PCIe (256 MB)	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
	NVIDIA Quadro FX 4600 PCIe (768 MB)**	Not supported	32-Bit, 64-Bit	WS 3, WS 4

\* Two NVIDIA Quadro NVS 285 PCIe cards may be used together on Red Hat or Windows XP 32-bit or 64-bit. Two NVIDIA Quadro FX 1500 PCIe cards may be used together on Windows XP 32-bit and x64. One NVIDIA Quadro NVS 440 PCIe and NVIDIA Quadro NVS 285 PCIe may be used together on Windows XP 32-bit.

\*\* This card consumes 1 PCIe slot and 1 PCI slot reducing the maximum number of PCI cards in a system

Miscellaneous	Windows Vista	Windows XP	Red Hat Linux
Solenoid lock and hood sensor	TBD	32-Bit, 64-Bit	WS 3, WS 4
Configure minitower in desktop orientation	N/A	32-Bit, 64-Bit	WS 3, WS 4
HP IEEE 1394a 3-Port PCI Card	32-Bit, 64-Bit	32-Bit, 64-Bit	

Software	Windows Vista	Windows XP	Red Hat Linux
Genuine Microsoft Vista™ Business 64	64-Bit	N/A	N/A
Genuine Microsoft Vista™ Business 32	32-Bit	N/A	N/A
OR Genuine Windows XP Professional	N/A	32-Bit	N/A
OR Genuine Windows XP Professional x64 Edition	N/A	64-Bit	N/A
OR Genuine Microsoft Windows Vista™ Business 64 downgrade to Microsoft Windows XP Professional x64 Edition	64-bit	64-Bit	N/A
OR Genuine Microsoft Windows Vista™ Business 32 downgrade to Microsoft Windows XP Professional SP2	32-bit	32-bit	N/A
Red Hat Enterprise Linux WS 4 (32 & 64-bit)	N/A	N/A	WS 3, WS 4
HP Red Hat Linux Installer Kit (includes drivers for both 32-bit & 64-bit OS versions on xw8200, xw6200, xw4400, xw4300)	N/A	N/A	WS 3, WS 4
Alert Standard Format specification	TBD	32-Bit, 64-Bit	N/A



### Standard Features - Custom Components

Symantec AntiVirus 10 (optional preinstall)	32-Bit, 64-Bit	32-Bit, 64-Bit	N/A
HP Performance Tuning Framework	32-Bit, 64-Bit	32-Bit, 64-Bit	N/A
Optional HP ProtectTools Security	32-Bit, 64-Bit	32-Bit	
HP Backup and Recovery	32-Bit, 64-Bit	32-Bit, 64-Bit	N/A
HP Client Manager Software v6.2 (optional download)	32-Bit, 64-Bit	32-Bit, 64-Bit	N/A
PDF Complete	32-Bit, 64-Bit	32-Bit, 64-Bit	N/A
Optional Microsoft Office 2007 Trial Edition	32-Bit (English language only)	32-Bit	N/A
Optional Microsoft Office 2007 Small Business Edition	32-Bit (English language only)	32-Bit	N/A
Intervideo WinDVD with DVD player	32-Bit, 64-Bit	32-Bit, 64-Bit	N/A
Roxio Easy Media Creator	32-Bit, 64-Bit	32-Bit, 64-Bit	Not supported

## Standard Features - Specs

Form Factor	Minitower	
Color	Carbonite/Alloy metallic	
Convertibility	Yes. 5.25" drives rotate for Minitower or Desktop orientation.	
Expansion Slots (see mainboard section for more details)	<ul style="list-style-type: none"> <li>• 3 PCI slots (full-height, full-length)</li> <li>• 1 PCI Express x16 slot (x4 functionality)</li> <li>• 1 PCI Express x1 slot</li> <li>• 1 PCI Express x16 graphics slot</li> </ul>	
Expansion Bays (see storage section for more details)	<ul style="list-style-type: none"> <li>• 2 internal 3.5" bays</li> <li>• 1 external 3.5" bay, 3 external 5.25" bays*</li> </ul> <p><b>NOTE:</b> Third external 5.25" bay is not full depth in side orientation.</p>	
Front I/O	2 USB 2.0, 1 IEEE 1394 (requires optional PCI card to function), 1 audio out, and 1 microphone.  <p><b>NOTE:</b> Although HP Personal Workstations can be ordered with the HP Installer Kit for Linux and an IEEE 1394 card, HP cannot provide customer support for this configuration. Please refer to the Linux Hardware Support Matrix (<a href="http://www.hp.com/support/linux_hardware_matrix">http://www.hp.com/support/linux_hardware_matrix</a>) for details, and to the Linux User Manual (<a href="http://www.hp.com/support/linux_user_manual">http://www.hp.com/support/linux_user_manual</a>) for tips on user-enablement of the IEEE 1394 Card.</p>	
Internal I/O	1 USB 2.0 header	
Rear I/O	5 USB 2.0, 1 serial, 1 optional serial port, parallel port, 2 PS/2, RJ-45 (NIC), 1 audio in, 1 audio out, 1 microphone inches; audio/microphone ports can be made to function autosensing and interchangeably retaskable by downloading a driver)	
USB Keyboard	Optional	
USB Mouse	Optional	
PS/2 Keyboard	1	
PS/2 Mouse	1	
Interfaces Supported	1 SATA 3 Gb/s interface (4 SATA connectors), 1 EIDE interface for optical drives	
Hard Drive Controller (PCI) Supported	Optional Ultra320 or Ultra320 RAID (Hardware RAID is not supported on Linux systems. The Linux kernel, with built-in software RAID, provides excellent functionality and performance. It is a good alternative to hardware-based RAID. Please visit <a href="http://h20000.www2.hp.com/bc/docs/support/SupportManual/c00060684/c00060684.pdf">http://h20000.www2.hp.com/bc/docs/support/SupportManual/c00060684/c00060684.pdf</a> for RAID capabilities with Linux.)	
On-board RAID Support	Yes	
Chassis Dimensions (H x W x D)	17.7 x 6.6 x 17.9 inches; 45.0 x 16.8 x 45.6 cm 6.6 x 17.7 x 17.9 inches; 16.8 x 45.0 x 45.6 cm	
Weight	From 35.0 lb (15.88 kg), depending on configuration	
Shipping Weight	From 44.0 lb (19.96 kg), depending on configuration	
Temperature	Operating	40° to 95°F (5° to 35°C)
	Non-operating	-40° to 140°F (-40° to 60°C)
Humidity	Operating	8% to 85%
	Non-operating	8% to 90%
Maximum Altitude (non-pressurized)	Operating	10,000 feet; 3,000 m
	Non-operating	30,000 feet; 9,100 m
Power Supply	460 watts wide-ranging, active Power Factor Correction or optional 475 watts 80 PLUS wide-ranging, active Power Factor Correction	

## After-Market Options

PCI-Express Graphics	Windows Vista	Windows XP	Red Hat Linux	Part Number
<b>Professional 2D Multi Display Solutions</b>				
NVIDIA Quadro NVS 285 PCIe (128MB)	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	RD069AA
NVIDIA Quadro NVS 440 PCIe (256 MB)	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	PT453A
<b>Entry 3D</b>				
NVIDIA Quadro FX 560 PCIe (128 MB)	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	ES354AA
<b>Mid-range 3D</b>				
NVIDIA Quadro FX 1500 PCIe (256 MB)	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	ES355AA
ATI FireGL V3350 PCIe (256 MB)	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	RV705AA
<b>High-end 3D</b>				
NVIDIA Quadro FX 3500 PCIe (256 MB)	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	ES357AA
ATI FireGL V7200 PCIe (256 MB)	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	ES356AA
NVIDIA Quadro FX 4600 PCIe (768 MB)**	Not supported	32-Bit, 64-Bit	WS 3, WS 4	RV706AA

**NOTE:** \*\* This card consumes 1 PCIe slot and 1 PCI slot reducing the maximum number of PCI cards in a system

Hard Drives	Windows Vista	Windows XP	Red Hat Linux	Part Number
<b>SATA Hard Drives</b>				
HP 80 GB 10K rpm SATA 1.5Gb/s	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	EM172AA
HP 160 GB 10K rpm SATA 1.5Gb/s	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	EW222AA
HP 80 GB 7200 rpm SATA 3.0Gb/s	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	PY276AA
HP 160 GB 7200 rpm SATA 3.0Gb/s NCQ	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	PV944A
HP 250 GB 7200 rpm SATA 3.0Gb/s NCQ	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	EA788AA
HP 500 GB 7200 rpm SATA 3.0Gb/s NCQ	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	PV943A
HP 750 GB 7200 rpm SATA 3.0Gb/s NCQ	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	RH201AA
<b>SAS Hard Drives</b>				
146 GB 10K rpm SAS 3.0Gb/s	Windows XP	Windows XP	Red Hat Linux	Part Number
146 GB 10K rpm SAS 3.0Gb/s	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	EM173AA
73 GB 15K rpm SAS 3.0Gb/s	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	EA329AA
146 GB 15K rpm SAS 3.0Gb/s	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	EA330AA
300 GB 10K rpm SAS 3.0Gb/s	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	RH937AA
300 GB 15K rpm SAS 3.0Gb/s	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	EM174AA

## After-Market Options

Controllers		Windows Vista	Windows XP	Red Hat Linux	Part Number
<b>SCSI Controllers</b>					
	LSI 3041E 4-Port SAS 3 Gb/s host adapter, supports RAID 0, 1 1E and 10E	32-Bit, 64-Bit	32-Bit/64-Bit	Not supported*	EH417AA
	LSI 8344ELP 8-port SAS HW RAID Card	Not supported	32-Bit/64-Bit	Not supported*	EX830AA

\* Hardware RAID is not supported on Linux systems. The Linux kernel, with built-in software RAID, provides excellent functionality and performance. It is a good alternative to hardware-based RAID. Please visit <http://h20000.www2.hp.com/bc/docs/support/SupportManual/c00060684/c00060684.pdf> for RAID capabilities with Linux.

Removable storage devices		Windows Vista	Windows XP	Red Hat Linux	Part Number
	512 MB USB 2.0 Drive Key II	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	ED516AA
	1 GB USB 2.0 Drive Key II	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	AG382AA
	1.44 MB Internal Floppy Drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	DY670A
	HP 16-In-1 Media Card Reader with PCI Card	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	EM718AA
	HP StorageWorks DAT 40 USB external tape drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	DW023A
	HP StorageWorks DAT 40 USB internal tape drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	DW022A
	HP StorageWorks DAT 72 USB external tape drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	DW027A
	HP StorageWorks DAT 72 USB internal tape drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	DW026A
	HP StorageWorks DAT 160 USB external tape drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	Q1581A
	HP StorageWorks DAT 160 USB internal tape drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	Q1580A

## After-Market Options

Input Devices	Windows Vista	Windows XP	Red Hat Linux	Part Number
<b>Keyboards</b>				
HP PS/2 Standard Keyboard	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	DT527A
HP USB Standard Keyboard	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	DT528A
HP USB Smart Card Keyboard (Carbonite/Silver)	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	ED707AA
<b>Pointing Devices</b>				
HP PS/2 2-Button Scroll Mouse (mechanical)	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	DD440B
HP USB 2-Button Scroll Mouse (optical)	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	DC172B
HP USB 3-button mouse (optical)	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	DY651A
HP USB SpacePilot USB 3D Input Device	TBD	32-Bit, 64-Bit	Not Supported	EF390AA
HP USB SpaceExplorer USB 3D Input Device	32-Bit, 64-Bit	32-Bit, 64-Bit	Not Supported	RY429AA

Networking / Communications	Windows Vista	Windows XP	Red Hat Linux	Part Number
<b>NICs</b>				
Intel Pro 1000 PT Gigabit PCI Express NIC	32-Bit, 64-Bit	32-Bit	WS 3, WS 4	EH352AA
Broadcom NetXtreme Gigabit Ethernet PCIe Adapter	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	EA833AA
Agere PCI High-Speed 56K International SoftModem*	32-Bit, 64-Bit	32-Bit, 64-Bit		EK694AA

**NOTE:** \* Certain Windows Vista product features require advanced or additional hardware. Windows Vista Upgrade Advisor can help you determine which features of Windows Vista will run on your computer.

To download the tool, visit: <http://www.windowsvista.com/upgradeadvisor>.

For Windows Vista system requirements, visit: <http://www.windowsvista.com/systemrequirements>.

## After-Market Options

Memory (Unbuffered DIMMs)		Windows XP	Red Hat Linux	Part Number	
Configurations less than 512 MB are not supported on either Microsoft Vista 32 or 64, configurations less than 1 GB are not supported on Microsoft Vista 64	<b>PC2-5300 DDR2-667 DIMMs (ECC Unbuffered)</b>				
	256 MB (1 x 256 MB) PC2-5300E DDR2-667 ECC	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	PV939A
	512 MB (1 x 512 MB) PC2-5300E DDR2-667 ECC	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	PV940A
	1 GB (1 x 1 GB) PC2-5300E DDR2-667 ECC	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	PV941A
	2 GB (1 x 2 GB) PC2-5300E DDR2-667 ECC	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	PV942A
	<b>PC2-5300 DDR2-667 Memory (non-ECC Unbuffered)</b>				
	256 MB (1 x 256 MB) PC2-5300U DDR2-667 non-ECC	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	PX974AA
	512 MB (1 x 512 MB) PC2-5300U DDR2-667 non-ECC	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	PX975AA

Monitors	TFT displays	Part Number
	HP LP3065 30-inch Widescreen LCD Monitor	EZ320A4
	HP LP2465 24-inch Widescreen LCD Monitor	EF224A4
	HP L2065 20-inch LCD Monitor	EF227A4
	HP L1965 19-inch LCD Monitor	RA373AA

Multimedia		Windows Vista	Windows XP	Red Hat Linux	Part Number
	Adaptec Fireconnect 2100 Firewire (1394) PCI Card (Windows only)	32-Bit, 64-Bit	32-Bit, 64-Bit	Not supported*	PA997A
	HP FireWire 800 IEEE 1394b PCI Card	Not supported	32-Bit, 64-Bit	Not supported*	EA327AA

\* Although HP Personal Workstations can be ordered with the HP Installer Kit for Linux and an IEEE 1394a card, HP cannot provide customer support for this configuration. Please refer to the Linux Hardware Support Matrix ([http://www.hp.com/support/linux\\_hardware\\_matrix](http://www.hp.com/support/linux_hardware_matrix)) for details, and to the Linux User Manual ([http://www.hp.com/support/linux\\_user\\_manual](http://www.hp.com/support/linux_user_manual)) for tips on user-enablement of the IEEE 1394a Card.

Audio		Windows Vista	Windows XP	Red Hat Linux	Part Number
	SoundBlaster X-Fi XtremeMusic Audio Card (Windows only)	Not supported	32-Bit, 64-Bit	32-Bit, 64-Bit	EA326AA
	HP Satellite Speakers	ZD929AA	32-Bit, 64-Bit	32-Bit, 64-Bit	ZD929AA
	HP USB Powered Speakers	RD628AA	32-Bit, 64-Bit	32-Bit, 64-Bit	RD628AA

### After-Market Options

Optical Drives	Windows Vista	Windows XP	Red Hat Linux	Part Number
<b>DVD-ROM Drive</b>				
16X DVD-ROM w/ +R read	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	AA620B
<b>Combo Drive</b>				
SATA 48X CD-RW/DVD-ROM Combo Drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	EW267AA
<b>DVD+/-RW Drive</b>				
SATA SuperMulti DVD+/-RW LightScribe*	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4**	EW269AA

\* LightScribe creates a grayscale image similar to black and white photography. LightScribe media required and sold separately. Double-layer discs can store more data than single layer discs. However, double-layer discs burned with this drive may not be compatible with many existing single-layer DVD drives and players.

\*\* LightScribe software works with Microsoft Windows XP and Vista only.)

Security	Part Number
HP Solenoid Hood Lock/Sensor Kit	DE618A
HP Business PC Security Lock Kit	PV606AA
HP 2006 Business PC Security Lock Kit	EV265AA
Kensington Security Cable & Lock	PC766A

Racking Options	Part Number
HP xw4000 Depth Adjustable Fixed Rail Rack Kit	EK729AA

Other Devices	Part Number
Modem RJ11 Adapter Kit	DC131C
2nd serial port adapter	PA716A
Front Card Guide and Fan Guide Kit	DY648A
HP Optical Bay HDD Mounting Bracket	DY659A
HP Power Cord Kit	DM293A
HP Internal USB Port Kit	EM165AA

## After-Market Options

Software	Windows Vista	Windows XP	Red Hat Linux	Part Number
HP Remote Graphics SW V4 CD-ROM Media	32-Bit, 64-Bit	32-Bit	Not supported	RG091AA
HP Remote Graphics SW V4 for HP Sys LTU	Future support	32-Bit	Not supported	RG088AA
HP Remote Graphics SW V4 Receiver LTU	Future support	32-Bit	Not supported	RG090AA
HP Remote SW for HP 1yr Update Subscrpt	Future support	32-Bit	Not supported	PN680A
HP Remote SW Receiver 1y Update Subscrpt	Future support	32-Bit	Not supported	PN682A
HP RGS V5 Receiver Site License	Future support	32-Bit	Not supported	GN034AA
HP RGS V5 Workstation Edition	Future support	32-Bit	Not supported	GN035AA
HP RGS Workstation 3-year Software Assurance	Future support	32-Bit	Not supported	GN036AA




## Memory

### Intel 975X Express chipset

#### PC2-5300E DDR2-667 or PC2-5300U DDR2-667DIMMS

Only unbuffered DDR2 DIMMs (ECC unbuffered or non-ECC) are supported and must be either x8 or x16 width. Memory upgrades are accomplished by adding DIMMs of the same or varied sizes. The Intel 975X chipset supports both PC2-5300 DDR2-667 non-ECC and ECC unbuffered memory.

For best performance the total amount and type of memory loaded into Channel A and Channel B should be the same. If it is not, your computer will see all the RAM installed but will run the memory controller at a lower performance mode. Although not required, for best performance add the memory in pairs rather than as a single DIMM (two 512 MB DIMMs will have better performance than a single 1 GB DIMM). Also, add the memory into both channels (e.g. one in socket 1 and one in socket 3) to take advantage of dual channel performance. If you have unused slots within a channel, make them socket 2 and socket 4. This provides the best margin for the memory bus. If you are only using 1 DIMM, install it in socket 1.

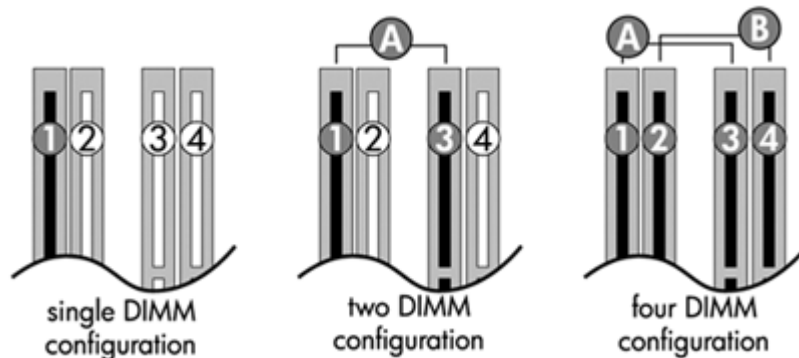

### MAXIMUM MEMORY

Supports up to 8 GB DDR2-667 ECC Unbuffered or 2 GB DDR2-667 non-ECC SDRAM


### POSSIBLE MEMORY CONFIGURATIONS

Not all memory configurations possible are represented below.

DIMM Size	Slot			
	1	2	3	4
256 MB (single channel performance configuration)	256 MB			
512 MB	256 MB		256 MB	
1 GB	512 MB		512 MB	
1.5 GB	256 MB	512 MB	256 MB	512 MB
2 GB	1 GB		1 GB	
2 GB	512 MB	512 MB	512 MB	512 MB
4 GB	1 GB	1GB	1 GB	1GB
4 GB	2 GB		2 GB	
6 GB	1 GB	2 GB	1 GB	2 GB
8 GB	2 GB	2 GB	2 GB	2 GB

## Storage Specifications

Tower configuration

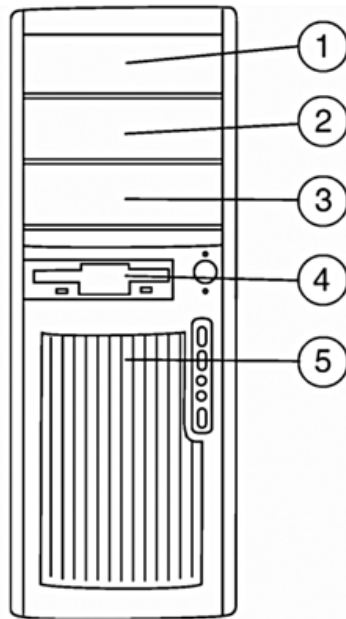

	Quantity Supported	Position Supported	Controller
<b>Convertible Minitower</b>			
Optional Diskette Drive	1	4	Diskette
Optical Disk Drives	2	1, 2	IDE or SATA (for SATA optical drives)
Hard Disk Drives	2 standard (2 additional in Optical Bays via adapter) (4 SATA, 4 SAS)	5, 6 (and 2 or 3, for 3rd or 4th drives using optical bays, adapter kit(s) required)	SATA (and/or optional SAS) Factory Integrated RAID* 0, 1, 5, 10 User configurable SATA RAID 0, 1, 10 standard

\* Hardware RAID is not supported on Linux systems. The Linux kernel, with built-in software RAID, provides excellent, functionality and performance. It is a good alternative to hardware-based RAID. Please visit <http://h20000.www2.hp.com/bc/docs/support/SupportManual/c00060684/c00060684.pdf> for RAID capabilities with Linux. Linux does not support the mixing of SATA and SAS drives.

## Technical Specifications

<b>System Board</b>	
Processor	One Intel Pentium Dual-Core processor or one Dual-Core Intel® Core™ 2 Duo E6x00 or one Quad-Core Intel Core 2 Extreme QX6700
Processor Socket	Single LGA771
CPU Bus Speed Supported	800 and 1066 MHz FSB
Standard L2 Cache	2 or 4 MB L2 cache, depending on specific processor and number of cores
Chipset	Intel 975X North Bridge/ICH7R South Bridge
Super I/O Controller	SMSC SCH5317
System Board Form Factor	ATX 9.6 x 12 inches; 243.84 x 304.8 mm
Memory Expansion Slots	4 DDR2 memory slots
Memory Type Supported	1.8V DDR2 (ECC and non-ECC) memory modules, up to quad ranked
Memory Speed Supported	DDR2 SDRAM PC2-5300 (667 MHz) ECC DDR2 SDRAM PC2-5300 (667 MHz) non-ECC
Maximum Memory	8 GB (4 DIMM slots)  * Maximum memory capacities assume 64-bit operating systems, such as genuine Windows® XP Professional x64 Edition. Genuine Windows XP Professional (32-bit) supports up to 4 GB. 32-bit Linux supports up to 8 GB.
Memory Protection	ECC memory only - ECC available on data, parity on address and command
Memory Modes	Dual channel
DIMM Connectors (DDR2, 1.8V)	4 ECC support
PCI Express Connectors (v1.0a)	1 PCI Express x16 1 PCI Express x16 (x4 bandwidth) 1 PCI Express x1
PCI Connectors (5.0V)	3 full length 33 MHz 32-Bit
Interfaces Supported	1 SATA 3.0Gb/s interface (4 SATA connectors); 1 PATA interface (2 PATA connectors) for optical drives
Hard Drive Controller (PCI) Supported	Optional Serial Attached SCSI with RAID (Hardware RAID is not supported on Linux systems. The Linux kernel, with built-in software RAID, provides excellent functionality and performance. It is a good alternative to hardware-based RAID. Please visit <a href="http://h20000.www2.hp.com/bc/docs/support/SupportManual/c00060684/c00060684.pdf">http://h20000.www2.hp.com/bc/docs/support/SupportManual/c00060684/c00060684.pdf</a> for RAID capabilities with Linux.)
Integrated SATA RAID	<ul style="list-style-type: none"> <li>● RAID 0, 1, 5*, or 10* on a single array, up to 4 hard drives (*available 2007)</li> <li>● Support for 1 or 2 RAID arrays on 4-ports for RAID 0 or 1</li> <li>● RAID 1 spare and auto-rebuild</li> <li>● Matrix RAID support</li> <li>● AHCI support for NCQ drives</li> <li>● 3.0Gb/s drive support</li> </ul> <p><b>NOTE:</b> Hardware RAID is not supported on Linux systems. The Linux kernel, with built-in software RAID, provides excellent functionality and performance. It is a good alternative to hardware-based RAID. Please visit <a href="http://h20000.www2.hp.com/bc/docs/support/SupportManual/c00060684/c00060684.pdf">http://h20000.www2.hp.com/bc/docs/support/SupportManual/c00060684/c00060684.pdf</a> for RAID capabilities with Linux.</p>
Network Controller	Integrated Broadcom 5755 Gigabit Ethernet LoM
IEEE 1394a Connectors	1 optional connector

## Technical Specifications

USB 2.0 Connectors	Front: 2 Rear: 5 Internal: 1
Wake-On-Lan®	Yes
HD Integrated Audio	Integrated high definition digital audio with S/PDIF 6-channel pass-through, stereo microphone, and Yamaha XG Lite Softsynth support  <b>NOTE:</b> If using RHEL WS 3, the audio drivers are not included as part of the standard RHEL WS 3 operating system. Use the ALSA audio drivers included on the HP Driver CD or from the HP support website. See <a href="http://www.hp.com/support/linux_hardware_matrix">http://www.hp.com/support/linux_hardware_matrix</a> and <a href="http://www.hp.com/support/linux_user_manual">http://www.hp.com/support/linux_user_manual</a> for details.
CD-ROM INCHES; Audio)	No
AUX INCHES; Audio)	Yes
Flash ROM	Yes
Clear CMOS Button	Yes
CPU Fan Header	Yes
Chassis Fan Header	Yes
Front Control Panel/Speaker Header	Yes
CMOS Battery Holder – Lithium	Yes
Hood Lock Header	Yes
Hood Sensor Header	Yes
Multibay Header	No
Integrated Trusted Platform Module	TPM 1.2
ASF 2.0 (Alert Standard Format)	Yes
Power Supply Headers	Yes
Power Switch, Power LED & Hard Drive LED Header	Yes
Password Clear Header	Yes

<b>Cooling</b>	
Chassis Fan	92 mm
Convertibility	70 or 80 mm
Processor Heatsink Fan	92 mm

## Technical Specifications

<b>80 PLUS Power Supply Option</b>	460 watt custom power supply - (Wide Ranging, Active PFC)	
Operating Voltage Range	90 - 269 VAC	
Rated Voltage Range	100 - 240 VAC	118 VAC
Rated Line Frequency	50/60 Hz	400Hz
Operating Line Frequency Range	47 - 66 Hz	393-407 Hz
Rated Input Current	7.4 A @ 100-240VAC	7.4 A @ 118 VAC
Heat Dissipation (Configuration and software dependent)	Typical	1121 btu/hr (283 kg-cal/hr)
	Maximum	2415 btu/hr (609 kg-cal/hr)
Power Supply Fan	92x25 mm variable speed	
Blue Angel Compliant (<5w in S5 - Power Off)	N/A	
FEMP Standby Power Compliant @115V (<2W in S5 - Power Off)	YES	
Power Consumption in ES Mode - Suspend to RAM (S3) (Instantly Available PC)	< 7 W	

<b>Power Supply</b>	475 watt custom power supply - (Wide Ranging, Active PFC)	
Operating Voltage Range	90 - 269 VAC	
Rated Voltage Range	100 - 240 VAC	118 VAC
Rated Line Frequency	50/60 Hz	400Hz
Operating Line Frequency Range	47 - 66 Hz	393-407 Hz
Rated Input Current	10 A @ 100-127VAC 6 A @ 200-240VAC	10 A @ 118 VAC
Heat Dissipation (Configuration and software dependent)	Typical	1013 btu/hr (255 kg-cal/hr)
	Maximum	2027 btu/hr (511 kg-cal/hr)
Power Supply Fan	92x25 mm variable speed	
Blue Angel Compliant (<5w in S5 - Power Off)	N/A	
FEMP Standby Power Compliant @115V (<2W in S5 - Power Off)	YES	
Power Consumption in ES Mode - Suspend to RAM (S3) (Instantly Available PC)	< 7 W	

<b>ROM Features</b>	
PCI 3.0 Support	Full BIOS support for PCI Express through industry standard interfaces.
ASF 2.0 Compliant	Allows workstation status to be monitored on a remote console.

## Technical Specifications

WMI Support	WMI is Microsoft's implementation of Web-Based Enterprise Management (WBEM) for Windows. WMI is fully compliant with the Distributed Management Task Force (DMTF) Common Information Model (CIM) and WBEM specifications.
BIOS Boot Spec 1.01 +	Provides more control over how and from what devices the workstation will boot.
BIOS Power on	Users can define a specific date and time for the system to power on.
Instantly Available PC (Suspend to RAM - ACPI sleep state S3)	Allows for very low power consumption with quick resume time
ROM Based Computer Setup Utility (F10)	Review and customize system configuration settings controlled by the BIOS.
Remote System Installation via F12 (PXE) (Remote Boot from Server)	Allows a new or existing system to boot over the network and download software, including the operating system
System/Emergency ROM Flash Recovery with Video	Recovers corrupted system BIOS
Serial, Parallel, USB, Audio, Network, Enable/Disable Port Control	Enable or disables serial, parallel, USB, audio, and network ports
Removable Media Write Control/ Boot Control	User can prevent the workstation from writing to or booting from removable media
Power-On Password	Prevents an unauthorized person from booting up the computer
Setup Password	Prevents an unauthorized person from changing the system configuration
Replicated Setup	Saves BIOS settings to diskette or USB flash device in human readable file. Repset.exe utility can then replicate these settings on machines being deployed without entering Computer Setup Utility (F10)
Memory Change Alert (Requires HP Client Manager Software)	Alerts management console if memory is removed or changed
Thermal Alert (Requires HP Client Manager Software)	Monitors the temperature state within the chassis. Three modes: <ul style="list-style-type: none"> <li>● NORMAL - normal temperature ranges</li> <li>● ALERTED - excessive temperatures are detected. Raises a flag so action can be taken to avoid shutdown or provide for a smoother system shutdown</li> <li>● SHUTDOWN - excessive temperatures are encountered. Automatically shuts down the computer without warning before hardware component damage occurs</li> </ul>
Remote ROM Flash	Provides secure, fail-safe ROM image management from a central network console
Remote Wakeup	<ul style="list-style-type: none"> <li>● System administrators can power on, restart, and power off a client computer from a remote location.</li> </ul>
ACPI (Advanced Configuration and Power Management Interface)	<ul style="list-style-type: none"> <li>● Allows the system to enter and resume from low power modes (sleep states)</li> <li>● Controls system power consumption, making it possible to place individual cards and peripherals in a low-power or powered-off state without affecting other elements of the system</li> <li>● Supports ACPI 2.0 for full compatibility with 64-bit operating systems</li> </ul>
SMBIOS	System Management BIOS 2.4, previously known as DMI BIOS, for system management information
ROM revision levels	Identifies system ROM revision levels and reports in Computer Setup Utility (F10). Version is stored in an industry standard memory location (SMBIOS) so that management SW applications can use and report this information
System board revision level	<ul style="list-style-type: none"> <li>● Allows management SW to read revision level of the system board</li> <li>● Revision level is digitally encoded into the HW and cannot be modified</li> </ul>
Ownership Tag	A user-defined string stored in non-volatile memory that is displayed in the BIOS splash screen

## Technical Specifications

Remote ROM Flash	Provides secure, fail-safe ROM image management from a central network console
Remote Wakeup/ Remote Shutdown	<ul style="list-style-type: none"> <li>System administrators can power on, restart, and power off a client computer from a remote location.</li> <li>Enables cost-effective power consumption when the administrator needs to distribute software, perform security management, or update the ROM.</li> </ul>
ROM Based Setup (F10) and Start-up Diagnostics	Yes

Industry Standard	Revision Supported by the BIOS
ACPI	Advanced Configuration and Power Management Interface, Version 2.0
ASF	Alert Standard Format Specification, Version 2.0
ATA (IDE)	ATA Attachment 6 with Packet Interface (ATA/ATAPI-6), Revision 3b
ATAPI	ATAPI Removable Media Device BIOS Specification Version 1.0
BBS	BIOS Boot Specification v1.01
BIOS 32-bit Services	Standard BIOS 32-bit Service Directory Proposal
CD Boot	"El Torrito" Bootable CD-ROM Format Specification Version 1.0
EDD	<ul style="list-style-type: none"> <li>Enhanced Disk Drive Specification Version 1.1</li> <li>BIOS Enhanced Disk Drive Specification Version 3.0</li> </ul>
EHCI	Enhanced Host Controller Interface for Universal Serial Bus, Revision 1.0
PCI	<ul style="list-style-type: none"> <li>PCI Local Bus Specification, Revision 2.3</li> <li>PCI Power Management Specification, Revision 1.1</li> <li>PCI Firmware Specification, Revision 3.0, Draft .7</li> </ul>
PCI Express	PCI Express Base Specification, Revision 1.0a
PMM	POST Memory Manager Specification, Version 1.01
SATA	<ul style="list-style-type: none"> <li>Serial ATA Specification, Revision 1.0a</li> <li>Serial ATA 3 Gb/s: Extensions to Serial ATA 1.5 Gb/s, Revision 1.0</li> </ul>
SMBIOS	System Management BIOS Reference Specification, Version 2.4
SPD	PC SDRAM Serial Presence Detect (SPD) Specification, Revision 1.2B
TPM	Trusted Computing Group TPM Specification Version 1.2
UHCI	Universal Host Controller Interface Design Guide, Revision 1.1
USB 1.1	Universal Serial Bus Revision 1.1 Specification
USB 2.0	Universal Serial Bus Revision 2.0 Specification

Other deployment & management features	
HP Client Management Solutions	<p>HP Client Management Solutions help simplify management of Workstations and significantly reduce total ownership costs. HP has two distinct client management product lines.</p> <p>The first client management product line consists of HP OpenView Configuration Management Solutions and HP OpenView Client Configuration Manager.</p> <p>The second client management product line is comprised of the HP Client Premium Suite, HP Client Foundation Suite, and HP Client Manager</p> <p>To learn more about all of these solutions, visit <a href="http://www.hp.com/go/easydeploy">http://www.hp.com/go/easydeploy</a></p>
HP Client Manager	<p>HP Client Manager is available for free for use with all HP business PCs, Notebooks, and Workstations. It enables central tracking, monitoring, and management of the hardware aspects of HP client systems:</p> <ul style="list-style-type: none"> <li>Get valuable hardware inventory information such as CPU, memory, video, and security settings</li> </ul>

## Technical Specifications

	<ul style="list-style-type: none"> <li>● Monitor system health to fix problems before they occur</li> <li>● Install drivers and BIOS updates without visiting each PC</li> <li>● Remotely configure BIOS and security settings</li> <li>● Automate processes to quickly resolve hardware problems</li> </ul> <p>Additional Altiris solutions (fee-based) are available to address Workstation management challenges through the entire IT lifecycle including:</p> <ul style="list-style-type: none"> <li>● Inventory assessment</li> <li>● Software license compliance</li> <li>● Personality migration</li> <li>● Software image deployment</li> <li>● Software distribution</li> <li>● Asset management</li> <li>● Problem resolution</li> </ul> <p>Visit <a href="http://www.hp.com/go/clientmanager">http://www.hp.com/go/clientmanager</a> for more information, to download HP Client Manager, and to evaluate the Altiris solutions</p>
System Software Manager (free, Windows only)	A free utility that detects and updates BIOS, device drivers, and management agent versions on your networked PCs and workstations
HP Backup and Recovery Manager (included with PC, Windows only)	HP Backup and Recovery Manager saves your computer's software image on Recovery Discs (CDs or DVDs). You have the flexibility to save both the original factory software image that came with your HP computer and your software image that includes your customizations and data. These Recovery Discs enable full recovery of your computer should a critical hardware failure occur. Since HP now provides this simple tool to create your own Recovery Discs, HP commercial PCs that include HP Backup and Recovery Manager will not include factory restore CDs. HP Backup & Recovery Manager is preloaded on new HP commercial desktops, workstations, notebooks, and tablet PCs introduced starting March 2006*. For product availability, visit <a href="http://www.hp.com/go/easydeploy">http://www.hp.com/go/easydeploy</a> . *Up to 8 GB of the hard drive is reserved for the system recovery software.
Replicated Setup	Saves BIOS settings to diskette or USB disk-on-key in human readable file. Repset.exe utility can then replicate these settings on machines being deployed without entering ROM-based F10 setup
Software Restore CD	Restores computer to its original factory shipping image
Asset Tag	<ul style="list-style-type: none"> <li>● Repository for storing company-specific property asset numbers for easy tracking</li> <li>● Initially set equal to the system serial number</li> <li>● Stored in a protected section of non-volatile memory that can be accessed and modified with the F10 Setup program</li> </ul>
DIMM Serial Presence Detect	Detects whether or not memory DIMMs are present and their type
Hard drive serial number, model, and manufacturer	Hard drive manufacturer, model, and serial number is stored in the hard drive firmware and reported in ROM-based F10 setup
Memory Change Alert (Requires HP Client Manager)	Alerts management console if memory is removed or changed
Ownership Tag	A user-defined string stored in non-volatile memory that is displayed in the BIOS splash screen
Ultra ATA Integrity Monitoring (CRC Checking)	A feature of SATA and SCSI, Cyclic Redundancy Checking provides data transfer verification and proactive notification of hard drive data transmission problems with recommendations for enhancing system performance. It detects all the following errors' types: <ul style="list-style-type: none"> <li>● single-bit errors</li> <li>● double-bit errors</li> <li>● an odd number of errors</li> </ul>



## Technical Specifications

	<ul style="list-style-type: none"> <li>• error bursts up to 32-bits long</li> </ul>
Drive Self Tests (DPS)	<ul style="list-style-type: none"> <li>• Drive Protection System (Adaptec and LSI SCSI controllers do not offer DPS)</li> <li>• A diagnostic hard drive self test. It scans critical physical components and every sector of the hard drive for physical faults and then reports any faults to the user.</li> <li>• Running independently of the operating system, it can be accessed through the computer's setup procedure. It produces an evaluation on whether the hard drive is the source of the problem and needs to be replaced.</li> </ul> <p>The system expands on the Self-Monitoring, Analysis, and Reporting Technology (SMART), a continuously running systems diagnostic that alerts the user to certain types of failures DPS Access through F10 Setup during Boot (F10 diagnostic access not available with SCSI drives)</p>
SMART Technology (Self-Monitoring, Analysis and Reporting Technology)	<p>Allows hard drives to monitor their own health and to raise flags if imminent failures were predicted Predicts failures before they occur. Tracks fault prediction and failure indication parameters such as re-allocated sector count, spin retry count, calibration retry count. By avoiding actual hard drive failures, SMART hard drives act as "insurance" against unplanned user downtime and potential data loss from hard drive failure.</p> <p>SMART I – Drive Failure Prediction SMART II – Off-Line Data Collection SMART III – Off-Line Read Scanning with Defect Reallocation</p>

Security Features	
Padlock support	Padlock loop in rear of chassis. Locks side cover and secures chassis from theft. (0.22" diameter)
Cable Lock Support	Kensington lock slot in rear of chassis. Locks side cover and secures chassis from theft. (3mm x 7mm opening)
Universal chassis clamp lock support	Threaded feature in rear of chassis. Locks side cover and locks cables to chassis. Secures chassis from theft and allows multiple units to be chained together when used with optional cable.
Solenoid lock and hood sensor	Yes
Rear Port Control Cover (optional)	Locks rear IO cables to prevent cable theft.
Serial, Parallel, USB Enable/Disable	Enable or disable serial, parallel or USB ports and hide them from the operating system
Removable Media Write/Boot Control	Prevents the computer from being booted from removable media on supported devices (and can disable writes to media)
Power-On Password	Prevents an unauthorized person from booting up the computer
Setup Password	Prevents an unauthorized person from changing the system configuration

## Technical Specifications

System Software Updating	
Product Change Notification	<ul style="list-style-type: none"> <li>• Program to proactively communicate Product Change Notifications (PCNs) and Customer Advisories by email to customers, based on a user-defined profile.</li> <li>• PCNs provide advance notification of hardware and software changes to be implemented in the factory providing time to plan for transition.</li> <li>• Customer Advisories provide concise, effective problem resolution, greatly reducing the need to call technical support.</li> </ul>
Remote ROM Flash	Provides secure, fail-safe ROM image management from a central network console
Remote Wakeup/ Remote Shutdown	<ul style="list-style-type: none"> <li>• System administrators can power on, restart, and power off a client computer from a remote location.</li> <li>• Enables cost-effective power consumption when the administrator needs to distribute software, perform security management, or update the ROM.</li> </ul>
ROM Based Setup (F10) and Start-up Diagnostics	Yes
Support Software CD & WWW	Yes

Other Features	
ACPI-Ready Hardware	Advanced Configuration and Power Management Interface (ACPI). <ul style="list-style-type: none"> <li>• Allows the system to wake from a low power mode.</li> <li>• Controls system power consumption, making it possible to place individual cards and peripherals in a low-power or powered-off state without affecting other elements of the system</li> </ul>

Serviceability Features of System	
Access Panel	Tool-less
Optical Drives	Tool-less
Floppy Drive	Tool-less
Hard Drives	Tool-less
Expansion Cards	Tool-less
Green user touch points	Yes, on tool-free internal chassis mechanisms
Color-coordinated cables and connectors	Yes
Memory	Tool-less, can be upgraded without removing any internal components
System Board	Tool-less removal
Dual Color Power and HD LED on Front of Computer (Indicates Normal Operations and Fault Conditions)	green – normal red – fault
System/Emergency ROM Flash Recovery with Video	Recovers corrupted system BIOS.
Configuration Record SW	Yes
Over-Temp Warning on Screen (Requires IM Agents)	Yes
Restore CD set	Restores the computer to its original factory shipping image

## Technical Specifications

Flash ROM	Yes
3.3V Aux Power LED on System PCA	Yes
Dual Function 5V Aux Power LED (ON)/PS_ON LED (OFF) on System PCA	Yes
Diagnostic Power Switch LED on board	Yes
Clear Password Jumper	Yes
Clear CMOS Button	Yes
CMOS Battery Holder for easy Replacement	Yes
Processor ZIF Socket for easy Upgrade	Yes
DIMM Connectors for easy Upgrade	Yes
NIC LEDs (integrated) (Green & Amber)	Used to determine NIC status
ASF 1.0 support (Alert Standard Format)	Industry-standard specification for network alerting in operating system-absent environments
Dual Function Front Power Switch	Also acts as a reset switch when held for 4 seconds

<b>Service and Support</b>	On-site Warranty and Service <sup>1</sup> : This three-year, limited warranty and service offering delivers three years of on-site, next business-day <sup>2</sup> service for parts and labor and includes free telephone support <sup>3</sup> 24 x 7. Global coverage <sup>2</sup> ensures that any product purchased in one country and transferred to another, non-restricted country will remain fully covered under the original warranty and service offering.
	<sup>1</sup> Terms and conditions may vary by country. Certain restrictions and exclusions apply.
	<sup>2</sup> On-site service may be provided pursuant to a service contract between HP and an authorized HP third-party provider, and is not available in certain countries. Global service response times are based on commercially reasonable best effort and may vary by country.
	<sup>3</sup> Technical telephone support applies only to HP-configured, HP and HP-qualified, third-party hardware and software. Toll-free calling and 24 x 7 support may not be available in some countries.

<b>Eco-Label Certifications &amp; Declarations</b>	<p>This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:</p> <ul style="list-style-type: none"> <li>● US Federal Energy Management Program (FEMP)</li> <li>● China Energy Conservation Program</li> <li>● IT ECO declaration</li> <li>● Japan PC Green label*</li> </ul> <p>* This product conforms to the examination standards (2003 version) under JEITA's 'PC Green Label System.'</p>
--	---

## Energy Consumption and Noise Emissions

## Technical Specifications

<b>Example Configuration</b>	Processor Info	1x 2.93GHz Core 2 Extreme					
	Memory Info	2x1 GB 667MHz					
	Graphics Info	FX1500					
	Disks/Optical/Floppy	2x160GB SATA / 2 Optical / 1 Floppy					
<b>Energy Consumption</b>		115 VAC		230 VAC		100 VAC	
		LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled
	Windows Idle (S0)	137W		134W		141W	
	Windows Busy Typ(S0)	196W		191W		198W	
	Windows Busy Max (S0)	257W		253W		268W	
	Sleep (S3)	3.5W	2.8W	4.1W	3.4W	3.5W	2.7W
	Off (S5)	2.3W	1.2W	2.9W	1.8W	1.9W	1.2W
<b>Heat Dissipation**</b>		115 VAC		230 VAC		100 VAC	
		LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled
	Windows Idle (S0)	468 btu/hr		457 btu/hr		481 btu/hr	
	Windows Busy Typ(S0)	669 btu/hr		652 btu/hr		676 btu/hr	
	Windows Busy Max (S0)	877 btu/hr		863 btu/hr		915 btu/hr	
	Sleep (S3)	11.9 btu/hr	9.56 btu/hr	13.9 btu/hr	11.6 btu/hr	11.6 btu/hr	9.22 btu/hr
	Off (S5)	6.48 btu/hr	4.09 btu/hr	9.89 btu/hr	6.14 btu/hr	6.48 btu/hr	4.09 btu/hr
<p>* Low energy mode</p> <p>** Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.</p> <p>This product is in compliance with US executive order 13221, WOL (wake on LAN) disabled.</p>							
<b>Declared Noise Emissions</b> (High and entry level configurations)							
<b>System Configuration</b> (Entry-level)	The entry-level configuration used for the Declared Noise Emissions for the Convertible Mini tower Desktop model is based on a "Typically Configured Desktop"						
<b>Declared Noise Emissions</b> (in accordance with ISO 7779 and ISO 9296)	<b>Processor Info</b>	<b>1.86 GHz Conroe Intel Core 2 Duo E6300 Processor</b>					
	<b>Disks/Optical/Floppy</b>	<b>1x 80 GB SATA / 1 DVD-ROM/ 1 Floppy</b>					
		<b>Sound Power</b> (LWad, bels)			<b>Deskside Sound Pressure</b> (LpAm, decibels)		
	<b>Idle</b>	4.2 Bels			26 dB		
	<b>SATA Hard drive Operating</b> (random reads - 30.3 reads/sec)	4.3 Bels			27 dB		
	<b>Floppy Drive Operating</b> (continuous copy)	5.1 Bels			33 dB		
<b>DVD-ROM Operating</b> (sequential reads)	5.1 Bels			39 dB			

## Technical Specifications

<b>System Configuration</b> (High-end)	The high-end configuration used for the Declared Noise Emissions for the Convertible Mini tower Desktop model is based on a "Typically Configured Desktop"		
<b>Declared Noise Emissions</b> (in accordance with ISO 7779 and ISO 9296)	<b>Processor Info</b> <b>Graphics Info</b> <b>Disks/Optical/Floppy</b>	<b>2.66 GHz Conroe Intel Core 2 Duo E6700 Processor</b> <b>Quadro FX 3500 with active heatsink</b> <b>1x 73 GB 15K rpm SAS / 1 DVD-ROM / 1 Floppy</b>	
		<b>Sound Power</b> (LWad, bels)	<b>Deskside</b> <b>Sound Pressure</b> (LpAm, decibels)
	<b>Idle</b>	4.9 Bels	27 dB
	<b>SATA Hard drive Operating</b> (random reads - 30.3 reads/sec)	5.2 Bels	34 dB
	<b>Floppy Drive Operating</b> (continuous copy)	5.2 Bels	35 dB
	<b>DVD-ROM Operating</b> (sequential reads)	5.3 Bels	36 dB
<b>Longevity and Upgrading</b>	<p>This product is designed to be upgraded, possibly extending its useful life by several years. Spare parts are available throughout the warranty period and for up to 5 years after the end of production. Upgradeability features contained in the product include:</p> <ul style="list-style-type: none"> <li>● Intel LGA775 processor socket</li> <li>● 4 USB ports</li> <li>● 3 PCI slots and 3 PCI Express slots</li> <li>● 5 storage bays</li> <li>● 4 memory slots</li> </ul>		
<b>Batteries</b>	<p>This product complies with ISO standards:</p> <ul style="list-style-type: none"> <li>● EU Directive 91/ 157/ EEC</li> <li>● EU Directive 93/ 86/ EEC</li> <li>● EU Directive 98/ 101/ EEC</li> </ul> <p>Batteries used in the product do not contain:</p> <ul style="list-style-type: none"> <li>● Mercury greater the 5ppm by weight</li> <li>● Cadmium greater than 10ppm by weight</li> <li>● Lead greater than 4000ppm by weight.</li> </ul> <p>Battery size: CR2032 (coin cell)            Battery type: Lithium</p>		
<b>Additional Information</b>	<ul style="list-style-type: none"> <li>● This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive - 2002/95/EC.</li> <li>● This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive – 2002/96/EC.</li> <li>● Plastics parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO1043.</li> <li>● This product contains 0% recycled materials (by wt.)</li> <li>● This product is &gt;90% recycle-able when properly disposed of at end of life.</li> </ul>		
	<b>Packaging Materials</b>		
	External	Cardboard carton and insert	2.70 kg
	Internal	LDPE Foam	0.35 kg
<b>Material Usage</b>	This product does not contain any of the following substances in excess of regulatory limits (refer to the HP General Specification for the		

## Technical Specifications

	<p>Environment at <a href="http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen_specifications.html">http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen_specifications.html</a>):</p> <ul style="list-style-type: none"> <li>● Asbestos</li> <li>● Certain Azo Colorants</li> <li>● Certain Brominated Flame Retardants – may not be used as flame retardants in plastics</li> <li>● Cadmium</li> <li>● Chlorinated Hydrocarbons</li> <li>● Chlorinated Paraffins</li> <li>● Formaldehyde</li> <li>● Halogenated Diphenyl Methanes</li> <li>● Lead carbonates and sulfates</li> <li>● Lead and Lead compounds</li> <li>● Mercuric Oxide Batteries</li> <li>● Nickel - finishes must not be used on the external surface designed to be frequently handled or carried by the user.</li> <li>● Ozone Depleting Substances</li> <li>● Polybrominated Biphenyls (PBBs)</li> <li>● Polybrominated Diphenyl Ethers (PBDEs)</li> <li>● Polybrominated Biphenyl Oxides (PBBOs)</li> <li>● Polychlorinated Biphenyl (PCB)</li> <li>● Polychlorinated Terphenyls (PCT)</li> <li>● Polyvinyl Chloride (PVC) – except for wires and cables, and certain retail packaging has been voluntarily removed from most applications.</li> <li>● Radioactive Substances</li> <li>● Tributyl Tinches; TBT), Triphenyl Tinches; TPT), Tributyl Tin Oxide (TBTO)</li> </ul>
<p><b>Packaging</b></p>	<p>HP follows these guidelines to decrease the environmental impact of product packaging:</p> <ul style="list-style-type: none"> <li>● Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.</li> <li>● Eliminate the use of ozone-depleting substances (ODS) in packaging materials.</li> <li>● Design packaging materials for ease of disassembly.</li> <li>● Maximize the use of post-consumer recycled content materials in packaging materials.</li> <li>● Use readily recyclable packaging materials such as paper and corrugated materials.</li> <li>● Reduce size and weight of packages to improve transportation fuel efficiency.</li> <li>● Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.</li> </ul>
<p><b>End-of-Life Management and Recycling</b></p>	<p>Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: <a href="http://www.hp.com/recycle">http://www.hp.com/recycle</a> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.</p>
<p><b>Hewlett-Packard Corporate Environmental Information</b></p>	<p>For more information about HP's commitment to the environment:          [link to new HP white paper now in progress]          Global Citizenship Report  <a href="http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html">http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html</a>          Eco-label certifications  <a href="http://www.hp.com/hpinfo/globalcitizenship/environment/productdesign/ecolabels.html">http://www.hp.com/hpinfo/globalcitizenship/environment/productdesign/ecolabels.html</a>          ISO 14001 certificates:  <a href="http://www.hp.com/hpinfo/globalcitizenship/environment/operations/envmanagement.html">http://www.hp.com/hpinfo/globalcitizenship/environment/operations/envmanagement.html</a></p>

## Technical Specifications - Audio

Integrated Intel/Realtek HD ALC260 Audio	Type	Integrated
	High Definition Codec	Yes
	FM Synthesis Support	Yes
	OPL3 FM Synthesis Support	Yes
	Sound Blaster Compatibility	Yes
	SPDIF 6-channel pass-through	No
	Audio Jacks	One Front fixed stereo analog Microphone-Inches; 20-K ohm Input Impedance) One Front fixed stereo Headphone-Out (expects at least a 32ohm load) One Line-In* (12-K ohm Input Impedance)* One Line-Out * (less than 800 ohms Output Impedance, expects at least a 10-K ohm load) One Stereo analog Microphone-In* (20-K ohm Input Impedance)
		* Rear audio port are re-taskable as Line-In, Line-Out, Microphone-In, or Headphone-Out with Optional driver, available only through download from HP support website and not supported by default. External Speakers need to be powered externally.
	Sampling	44.1 kHz/48 kHz/96 kHz/192 kHz (output only)
	Wavetable Syntheses (software)	Yes - GM and FM Midi Support, Direct Music and Down Loadable Soundset (4 Meg DLS Level 1 and 2 Support)
	3D Positional Sound	No
	Digital Audio	Yes
	Analog Audio	Yes
	DVD Audio	Yes
	Number of Channels on Line-Out (mono/stereo)	Stereo (Left & Right channels)
	Internal Audio Speaker Power Rating	1.5 W
	Internal Speaker	Yes
	Hardware Equalizer for Internal Speaker	No
	External Speaker Jack (Line-Out)	Yes
Sound Blaster X-Fi XtremeMusic (PCI)	Audio Quality	Total Harmonic Distortion + Noise at 1kHz (20kHz Low-pass filter) = 0.004%
	Signal to Noise Ratio (SNR)	Signal-to-Noise Ratio (20kHz Low-pass filter, A-Weighted)
		<ul style="list-style-type: none"> <li>● Stereo Output: 109dB</li> <li>● Front and Rear Channels: 109dB</li> <li>● Center, Subwoofer and Side Channels: 109dB</li> </ul>

## Technical Specifications - Audio

<b>Sound Conversion</b>	24-bit Analog-to-Digital conversion of analog inputs at 96kHz sample rate 24-bit Digital-to-Analog conversion of digital sources at 96kHz to analog 7.1 speaker output 24-bit Digital-to-Analog conversion of stereo digital sources at 192kHz to stereo output	
<b>Recording/Sampling Rate</b>	44.1, 48 and 96kHz	
<b>ASIO 2.0 support</b>	16-bit/44.1kHz, 16-bit/48kHz, 24-bit/44.1kHz 24-bit/48kHz and 24-bit/96kHz with direct monitoring	
<b>Enhanced SoundFont support</b>	up to 24-bit resolution 24-bit/96kHz	
<b>DACs</b>	24-bit/192kHz	
<b>Voice Support</b>	128 voices	
<b>Max. Channels in 3D Positional Audio</b>	7.1	
<b>EAX® ADVANCED HD™ 5.0 support</b>	Yes including EAX® MacroFX™, EAX® PurePath™ and Environment FlexiFX™	
<b>Connectors</b>	FlexiJack (Performing a 3-in-1 function, Digital In / Line In / Microphone) via 3.50 mm minijack Line level out (Front / Rear / Center / Subwoofer / Rear Center) via 3.50 mm minijacks AUX_IN line-level analog input via 4-pin Molex connector on card One AD_Link (26 pin) connector for linking to the X-Fi I/O Console (upgrade option)	
<b>Dimensions</b>	7.25" x5" x .9"	
<b>Additional product features</b>	<b>Movies</b>	THX Certification Dolby Digital EX 6.1 Playback DTS-ES 6.1 Playback
	<b>Music</b>	X-Fi 24-bit Crystalizer CMSS-3D SuperRip
	<b>Audio Creation</b>	Pristine audio playback quality with a near transparent SRC engine Up to eight 24 bit hardware effects ASIO recording with latency as low as one millisecond 24-bit SoundFont® sampling 3D MIDI
	<b>Gaming</b>	EAX ADVANCED HD 5.0
	<b>Software Bundle</b>	Doom 3 Sound Blaster EAX patch Entertainment Mode Audio Creation Mode Game Mode Mode Switcher Audio Console Creative MediaSource Creative MediaSource DVD-Audio Player DTS Neo:6 Settings



## Technical Specifications - Audio

		Karaoke Player
		Entertainment Center
		Smart Recorder
		SoundFont Bank Manager
		Speaker Connection Wizard
		THX Setup Console
		Vienna SoundFont Studio
		Volume Panel
		WaveStudio
		Console Launcher
		Creative Media Toolbox
		Creative Diagnostics
<b>Minimum system requirements</b>	<b>System RAM</b>	256MB
	<b>Hard disk</b>	600MB free space
		Available PCI 2.1 slot for the audio card
		CD-ROM/CD-RW or CD/DVD-ROM required for software installation
	<b>Operating System</b>	Microsoft Windows XP Service Pack 2 (SP2)

## Technical Specifications - Communications

Integrated PCI Express Broadcom BCM5755 NetXtreme Gigabit Ethernet Network Controller LoM	Connector	RJ-45
	Controller	Broadcom 5755 PCI-E LAN Controller
	Memory	Integrated 64KB receive buffer and 8KB transmit buffer
	Data rates supported	10/100/1000 Mbps
	Compliance	IEEE 802.3, 802.3AB and 802.3u compliant, 802.3x flow control
	Bus architecture	PCI-E 1.0a
	Data path width	X1
	Data path speed	2.5Gbit per sec per direction transfer rate
	Data transfer mode	Bus-master DMA
	Hardware certifications	
	Power requirement	1.5 watts @ +3.3V AUX supply
	Boot ROM support	Yes
	Network transfer rate	10BASE-T (half-duplex) 10 Mbps 10BASE-T (full-duplex) 20 Mbps 100BASE-TX (half-duplex) 100 Mbps 100BASE-TX (full-duplex) 200 Mbps 1000BASE-T, 1000 Mbps
	Operating system driver support	Microsoft Windows Vista Business 32 and 64, Microsoft Windows XP Professional, Microsoft Windows XP Professional x64 Edition, Red Hat Enterprise Linux 3
	Management capabilities	WOL, PXE
	Alerting	ASF 2.0
<hr/>		
Intel Pro 1000 PT PCI Express Gigabit NIC (Part# EH352AA)	Connector	RJ-45
	Controller	Intel 82572EI Gigabit Ethernet Controller
	Memory	Integrated Dual 48K configurable transmit receive FIFO Buffers
	Data rates supported	10/100/1000 Mbps
	Compliance	IEEE 802.1P, 802.1Q, 802.2, 802.3, 802.3AB and 802.3u compliant, 802.3x flow control
	Bus architecture	PCI-E 1.0a
	Data path width	X1, 250MB/s, Bi-directional interface
	Data transfer mode	Bus-master DMA
	Hardware certifications	FCC, B, CE, TUV- cTUVus Mark Canada and United States, TUV- GS Mark for European Union
	Power requirement	Aux 3.3V, 3.0 Watts in 1000base-T and 2.0 Watts in 100Base-T
	Boot ROM support	Yes
	Network transfer rate	10BASE-T (half-duplex) 10 Mbps 10BASE-T (full-duplex) 20 Mbps 100BASE-TX (half-duplex) 100 Mbps 100BASE-TX (full-duplex) 200 Mbps 1000BASE-T, 1000 Mbps

## Technical Specifications - Communications

Environmental	<b>Operating temperature</b>	32° to 131° F (0° to 55° C)
	<b>Operating humidity</b>	85% at 131° F (55° C)
Dimensions		6.4 x 2.6 x 0.8 inches; 16.3 x 6.6 x 1.9 cm)
Operating system driver support		Microsoft Windows Vista Business 32 and 64, Microsoft XP, Red Hat Linux 7.2, Linux 7.3 and Red Hat Enterprise Linux WS 3
Management capabilities		ASF, WOL , PXE, DMI, WFM 2.0.
Kit contents		Intel Pro 1000 PT PCI Express Gigabit NIC, CD containing Intel PROset II NIC drivers, quick install guide, product warranty statement

Broadcom BCM5751 NetXtreme Gigabit Ethernet Controller (PCIe) (Part# EA833AA)	Connector	RJ-45	
	Controller	Broadcom 5751 PCI-E 1.0a LAN Controller	
	Memory	Integrated 96Kb frame buffer memory	
	Data rates supported	10/100/1000 Mbps	
	Compliance	IEEE 802.3, 802.3AB and 802.3u compliant, 802.3x flow control	
	Bus architecture	PCI-E 1.0a	
	Data path width	X1	
	Data path speed	2.5Gbit per sec per direction transfer rate	
	Data transfer mode	Bus-master DMA	
	Hardware certifications	FCC class B, NRTL Mark Canada and United States, C-Tick for Australia, BSMI for Taiwan, VCCI for Japan, MIC for Korea, GOST for Russia	
	Power requirement	3.1 watts @ +3.3V AUX supply	
	Boot ROM support	Yes	
	Network transfer rate		10BASE-T (half-duplex) 10 Mbps
			10BASE-T (full-duplex) 20 Mbps
		100BASE-TX (half-duplex) 100 Mbps	
		100BASE-TX (full-duplex) 200 Mbps	
		1000BASE-T, 1000 Mbps	
Environmental	<b>Operating temperature</b>	32° to 131° F (0° to 55° C)	
	<b>Operating humidity</b>	85% at 131° F (55° C)	
Dimensions		4.4 x 2.2 x 0.08 inches; 11.2 x 5.5 x .2 cm	
Operating system driver support		Microsoft Windows Vista Business 32 and 64, Microsoft Windows 2000 and XP, Red Hat Linux 7.2, 7.3 and Red Hat Enterprise Linux 3	
Management capabilities		WOL, PXE , Remote cable management	
Alerting		ASF 2.0	
Kit contents		Broadcom 5751, CD, Broadcom NetXtreme Gigabit Ethernet PCI NIC, drivers, quick install guide, product warranty statement	

Agere Systems PCI International SoftModem (Part# EK694AA)	Data Transmission	Technology speeds: 56,000 Kbps maximum downstream data, controllerless <b>NOTE:</b> 56 Kbps technology refers to download speeds only and requires compatible modems at server sites. Other conditions may limit modem speed. FCC limitations allow a maximum of 53 Kbps during download transmissions.
---	-------------------	--

### Technical Specifications - Communications

<b>Data Speeds</b>	(Upload only) 33,600/31,200/28,800/26,400/21,600/19,200/16,800/14,400/12,000/ 9,600/7,200/4,800/2,400/1,200/300
<b>Data Standards</b>	ITU-T V.90, ITU-T, ITU-T V.34, V.44, V.42, V.42bis21, V.32bis, Bell 212A, and Bell 103
<b>Fax Speeds</b>	14,400/12,000/9,600/7,200/4,800/2,400/1,200/300 b/s
<b>Fax Mode Capabilities</b>	ITU-T T.31 class 1 FAX, V. 17, V.29, V.27ter, and V.21 Channel 2
<b>Error Correction and Data Compression</b>	V.44, 42bis, V.42 and MNP2-5
<b>Power Management</b>	ACPI; PPMI 1.1 and wake support with PME and Vaux; meets PCI 2.3 requirements and PC 2001 requirements
<b>Upgradeability</b>	Driver upgradeable for future enhancements
<b>Video</b>	ITU-T V.80 video ready interface
<b>Other</b>	TIA/EIA 602 standard AT command set Integrated DTE interface with speeds of up to 115.2 Kbps, parallel 16550a UART-compatible interface Optional ring wakeup signal
<b>Operating Temperature</b>	32° to 158° F (0° to 70° C)
<b>Operating Humidity</b>	20% to 90%, non-condensing
<b>Operating System Support</b>	Microsoft Windows XP Professional, Microsoft Windows XP Professional x64 Edition
<b>OS Driver Support</b>	Microsoft Windows XP Professional, Microsoft Windows XP Professional x64 Edition
<b>Power</b>	Requires a 3.3-V auxiliary power rail on PCI bus Uses only one PCI load (i.e., one grant/request pair), one shared IRQ, one electrical load
<b>Chipset</b>	Agere Systems SV92PL - Integrated PCI interface with 5-V tolerant buffers and CardBus support
<b>Dimensions (L X H)</b>	Complies with PCI low profile specifications-6.7 x 2.3 inches; 17.0 x 5.8 cm and supports high- and low-profile brackets
<b>Connection</b>	Single RJ-11 connector
<b>Other Features</b>	Digital line protection, call progress monitoring via on-board piezo device, support for high profile and low profile brackets, PnP ID support
<b>Safety</b>	UL recognized to UL 1950, 3rd edition (U.S. and Canada); IEC 950 (TUV, NEMKO, DEMKO, SEMKO); CE Mark, EC 950 (TUV, NEMKO, DEMKO, SEMKO, CE mark
<b>EMC</b>	FCC Part 15, IC ES003, EN 55022, 3rd edition, EN 55024, annex A, EN 61000-4-6, EN 61000-4-8
<b>Telecom</b>	FCC Part 68, IC-CS-03 (Canada); Worldwide PTT approvals Not available in Korea or the Republic of South Africa.
<b>Health</b>	Bare PCB material compliant to 94V-0 or better (marked as such)
<b>Other</b>	PC 2001 compliant, PCI version 2.3, WHQL approved; ACPI compliant
<b>Kit Contents</b>	DC132D : Agere Systems PCI International Softmodem with full-height bracket attached, additional low-profile bracket, RJ11 modem cable, driver and documentation CD.

**NOTE:** RJ11 modem adapter is not included.

DC131C #xxx: RJ11 modem adapter kit for use with DC132D

#ACP: Austria, #ABW: Belgium (Dutch/Flemish), #AKN: Bosnia, Herzegovna, Croatia, Slovenia, Yugoslavia (Slovenian), #AKB: Czech Republic (Czech) & Slovakia, #ABF: France, #ABD: Germany, #AB7:

## Technical Specifications - Controllers

LSI SAS 8344ELP 3Gb/s RAID Controller	PCI Bus	PCI-Express x4 lanes		
	PCI Modes	Bus Master DMA		
	RAID Levels	0, 1, 5, 10 and 50		
	PCI data burst transfer rate	1.0 GBps ( half duplex ) 2.0 GBps ( full duplex )		
	SAS Bandwidths	<b>Half Duplex</b>	<b>Full Duplex</b>	
		Single lane - 300 MBps	Single SAS Lane - 600 MBps	
		Wide Port (2 lanes) - 600 MBps	Wide Port (2 lanes) - 1200 MBps	
		Wide Port (4 lanes) - 1200 MBps	Wide Port (4 lanes) - 2400 MBps	
	PCI Card Type	3.3 volt add-in card		
	PCI Voltage	12 V $\pm$ 10%		
	PCI Form Factor	6.6" x 2.731" (Low-profile)		
	PCI Power	7.5 Watts		
	Bracket	Full height and Low-profile		
	Certification Level	PCI-Express 1.0a		
	IO Bus	Eight 3Gbps SAS/SATA ports		
	SAS Processor	Intel IOP333 I/O Processor		
	Internal Connectors	One SAS SFF8087 x4 internal connector		
	External Connectors	One SAS SFF8470 x4 external connector		
	Max. Number of SAS Devices	32		
	LED Indicators	On-board activity and fault LEDs		
	Integrated Mirroring	Integrated Mirroring option available		
	Environments	Operating	Storage	
Temperature	0 to 60 C	-45 to +105 C		
Relative Humidity	5 to 90% non-condensing	5 to 90% non-condensing		
MTBF	>200,000 hours			
Compliances	EMC: Class B-US (CFR 47, P15B); Canada (ICES-003); Japan (V-3/02.04); Europe (EN55022/EN55024); Australia/New Zealand (AS/NZS 3548); Safety: EN60950			
Operating system support	Microsoft® Windows® XP Professional, XP Professional x64 Red Hat Linux WS3 and WS4			
Kit contents	Controller card, driver CD, LED cables, user documentation and warranty card.			

\* Due to the placement of the I/O controller engine on the SAS 8344ELP, external cables from the SAS 8344ELP RAID controller to the storage enclosure may not be longer than two meters; this card also does not support the use of external fan-out cables. See [http://h20000.www2.hp.com/bizsupport/TechSupport/Document.jsp?lang=en&cc=us&objectID=c00817918&jumpid=reg\\_R1002\\_USEN](http://h20000.www2.hp.com/bizsupport/TechSupport/Document.jsp?lang=en&cc=us&objectID=c00817918&jumpid=reg_R1002_USEN) for additional information

## Technical Specifications - Controllers

LSI SAS3041E Serial Attach SCSI (SAS) Host Bus Adapter (HBA) (Part# EH417AA)	PCI Bus	PCI-Express x4 lanes	
	PCI Modes	Bus Master DMA	
	PCI data burst transfer rate	1.0 GBps ( half duplex ) 2.0 GBps ( full duplex )	
	SAS Bandwidths	<b>Half Duplex</b>	<b>Full Duplex</b>
		Single lane – 300 MBps	Single SAS Lane – 600 MBps
		Wide Port (2 lanes) – 600 MBps	Wide Port (2 lanes) – 1200 MBps
		Wide Port (4 lanes) – 1200 MBps	Wide Port (4 lanes) – 2400 MBps
	PCI Card Type	3.3 volt add-in card	
	PCI Voltage	12 V ± 10%	
	PCI Form Factor	6.6" x 2.731" (Low-profile)	
	PCI Power	7.5 Watts	
	Bracket	Full height and Low-profile	
	Certification Level	PCI-Express 1.0a	
	IO Bus	Four 3Gbps SAS/SATA ports	
	SAS Processor	LSISAS1064E	
	Internal Connectors	Four- SATA x1 connectors	
	External Connectors	None	
	Max. Number of SCSI Devices	128	
	LED Indicators	On-board activity and fault LEDs	
	Integrated Mirroring	Integrated Mirroring option available	
	Environments	<b>Operating</b>	<b>Storage</b>
	Temperature	32° to 140° F (0° to 60° C)	-49° to 221° F (-45° to +105° C)
	Relative Humidity	5% to 90% non-condensing	5% to 90% non-condensing
	MTBF	>200,000 hours	
	Compliances	EMC: Class B-US (CFR 47, P15B); Canada (ICES-003); Japan (V-3/02.04); Europe (EN55022/EN55024); Australia/New Zealand (AS/NZS 3548); Safety: EN60950	
	Operating system support	Microsoft Vista Business 32 and 64, Microsoft Windows XP Professional, XP Professional x64, Red Hat Linux 7.2, 7.3, WS3 and WS4	
	Kit contents	Controller card, driver CD, LED cables, user documentation and warranty card.	

## Technical Specifications - Hard Drives

SATA 3.0Gb/s hard drives 160 GB (10k rpm)	<b>Capacity</b>	160,041,885,696 bytes	
	<b>Height</b>	1 inches; 2.54 cm	
	<b>Width</b>	Media diameter: 3.0 inches; 7.62 cm Physical size: 4 inches; 10.2 cm	
	<b>Interface</b>	Serial ATA (1.5 Gb/s), Native Command Queuing enabled	
	<b>Synchronous Transfer Rate (Maximum)</b>	Up to 1.5 Gb/s	
	<b>Cache</b>	16 Mbytes	
	<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track</b> 0.3 ms <b>Average</b> 4.6 ms <b>Full-Stroke</b> 10.2 ms	
	<b>Rotational Speed</b>	10,000 rpm	
	<b>Logical Blocks</b>	312,581,808	
	<b>Operating Temperature</b>	41° to 131° F (5° to 55° C)	
	80 GB (10k rpm)	<b>Capacity</b>	80,026,361,856 bytes
		<b>Height</b>	1 inches; 2.54 cm
		<b>Width</b>	Media diameter: 3.0 inches; 7.62 cm Physical size: 4 inches; 10.2 cm
<b>Interface</b>		Serial ATA (1.5 Gb/s), Native Command Queuing enabled	
<b>Synchronous Transfer Rate (Maximum)</b>		Up to 1.5 Gb/s	
<b>Cache</b>		16 Mbytes	
<b>Seek Time</b> (typical reads, includes controller overhead, including settling)		<b>Single Track</b> 0.3 ms <b>Average</b> 4.6 ms <b>Full-Stroke</b> 10.2 ms	
<b>Rotational Speed</b>		10,000 rpm	
<b>Logical Blocks</b>		156,301,488	
<b>Operating Temperature</b>		41° to 131° F (5° to 55° C)	
80 GB (7,200 rpm)		<b>Capacity</b>	80,026,361,856 bytes
		<b>Height</b>	1 inches; 2.54 cm or less
		<b>Width</b>	Media diameter: 3.5 inches; 8.89 cm Physical size: 4 inches; 10.2 cm
	<b>Interface</b>	Serial ATA (3.0 Gb/s)	
	<b>Synchronous Transfer Rate (Maximum)</b>	Up to 300 MB/s	
	<b>Cache</b>	8 MB	



## Technical Specifications - Hard Drives

	<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track</b>	0.9 ms
		<b>Average</b>	11.0 ms
		<b>Full-Stroke</b>	18 ms
	<b>Rotational Speed</b>		7,200 rpm
	<b>Logical Blocks</b>		156,301,488
	<b>Operating Temperature</b>		41° to 131° F (5° to 55° C)
<b>160 GB</b> (7,200 rpm)	<b>Capacity</b>		160,041,885,696 bytes
	<b>Height</b>		1 inches; 2.54 cm or less
	<b>Width</b>		Media diameter: 3.5 inches; 8.89 cm Physical size: 4 inches; 10.2 cm
	<b>Interface</b>		Serial ATA (3.0 Gb/s), Native Command Queuing enabled
	<b>Synchronous Transfer Rate</b> (Maximum)		Up to 300 MB/s
	<b>Buffer</b>		8 MB
	<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track</b>	0.9 ms
		<b>Average</b>	11.0 ms
		<b>Full-Stroke</b>	18 ms
	<b>Rotational Speed</b>		7,200 rpm
	<b>Logical Blocks</b>		312,581,808
	<b>Operating Temperature</b>		41° to 131° F (5° to 55° C)
<b>250 GB</b> (7,200 rpm)	<b>Capacity</b>		250,059,350,016 bytes
	<b>Height</b>		1 inches; 2.54 cm or less
	<b>Width</b>		Media diameter: 3.5 inches; 8.89 cm Physical size: 4 inches; 10.2 cm
	<b>Interface</b>		Serial ATA (3.0 Gb/s), Native Command Queuing enabled
	<b>Synchronous Transfer Rate</b> (Maximum)		Up to 300 MB/s
	<b>Buffer</b>		8 MB
	<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track</b>	1.0 ms
		<b>Average</b>	11.0 ms
		<b>Full-Stroke</b>	18 ms
	<b>Rotational Speed</b>		7,200 rpm
	<b>Logical Blocks</b>		488,397,168
	<b>Operating Temperature</b>		41° to 131° F (5° to 55° C)
<b>500 GB</b> (7,200 rpm)	<b>Capacity</b>		500,107,862,016 bytes
	<b>Height</b>		1 inches; 2.54 cm or less
	<b>Width</b>		Media diameter: 3.5 inches; 8.89 cm Physical size: 4 inches; 10.2 cm

## Technical Specifications - Hard Drives

<b>Interface</b>	Serial ATA (3.0 Gb/s), Native Command Queuing enabled	
<b>Synchronous Transfer Rate (Maximum)</b>	Up to 300 MB/s	
<b>Buffer</b>	8 MB	
<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track</b>	1.3 ms
	<b>Average</b>	20.0 ms
	<b>Full-Stroke</b>	30 ms
<b>Rotational Speed</b>	7,200 rpm	
<b>Logical Blocks</b>	976,773,168	
<b>Operating Temperature</b>	41° to 131° F (5° to 55° C)	

750 GB  
(7,200 rpm)

<b>Capacity</b>	750,156,374,016 bytes	
<b>Height</b>	1 inches; 2.54 cm or less	
<b>Width</b>	Media diameter: 3.5 inches; 8.89 cm	
	Physical size: 4 inches; 10.2 cm	
<b>Interface</b>	Serial ATA (3.0 Gb/s), Native Command Queuing enabled	
<b>Synchronous Transfer Rate (Maximum)</b>	Up to 300 MB/s	
<b>Buffer</b>	8 MB	
<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track</b>	0.8 ms
	<b>Average</b>	14.0 ms
	<b>Full-Stroke</b>	20 ms
<b>Rotational Speed</b>	7,200 rpm	
<b>Logical Blocks</b>	1,465,149,168	
<b>Operating Temperature</b>	41° to 131° F (5° to 55° C)	

Serial Attached SCSI (SAS) 300 GB  
Hard Drives (15K rpm)

<b>Capacity</b>	300,000,000,000 bytes	
<b>Height</b>	1.0 in (25.4mm)	
<b>Width</b>	4.0 in (101.6mm)	
<b>Interface</b>	SAS	
<b>Synchronous Transfer Rate (Maximum)</b>	3.0 Gb/s	
<b>Buffer</b>	16 MB	
<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track</b>	0.2 ms
	<b>Average</b>	3.5 ms
	<b>Full-Stroke</b>	7.0 ms
<b>Rotational Speed</b>	15,000 rpm	
<b>Logical Blocks</b>	585,937,500 - 512 byte blocks	
<b>Operating Temperature</b>	50° to 95° F (10° to 35° C)	

300 GB  
(10K rpm)

<b>Capacity</b>	300,000,000,000 bytes	
<b>Height</b>	1.0 in (25.4mm)	

## Technical Specifications - Hard Drives

	<b>Width</b>	4.0 in (101.6mm)	
	<b>Interface</b>	SAS	
	<b>Synchronous Transfer Rate (Maximum)</b>	3.0 Gb/s	
	<b>Buffer</b>	16 MB	
	<b>Seek Time</b>	<b>Single Track</b>	0.3 ms
	(typical reads, includes controller overhead, including settling)	<b>Average</b>	<4.5 ms
		<b>Full-Stroke</b>	<11.0 ms
	<b>Rotational Speed</b>	15,000 rpm	
	<b>Logical Blocks</b>	585,937,500 - 512 byte blocks	
	<b>Operating Temperature</b>	50° to 95° F (10° to 35° C)	
<b>146 GB</b> (10K rpm)	<b>Capacity</b>	146,815,737,856 bytes	
	<b>Height</b>	1.0 in (25.4mm)	
	<b>Width</b>	4.0 in (101.6mm)	
	<b>Interface</b>	SAS	
	<b>Synchronous Transfer Rate (Maximum)</b>	3.0 Gb/s	
	<b>Buffer</b>	16 MB	
	<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track</b>	0.3 msec
		<b>Average</b>	<4.5 msec
		<b>Full-Stroke</b>	<11.0 msec
	<b>Rotational Speed</b>	10,000 rpm	
	<b>Logical Blocks</b>	286,749,488 - 512 byte blocks	
	<b>Operating Temperature</b>	50° to 95° F (10° to 35° C)	
<b>73 GB</b> (15K rpm)	<b>Capacity</b>	73,407,865,856 bytes	
	<b>Height</b>	1.0 in (2.54 cm)	
	<b>Width</b>	4.0 in (101.6mm)	
	<b>Interface</b>	SAS	
	<b>Synchronous Transfer Rate (Maximum)</b>	3.0 Gb/s	
	<b>Buffer</b>	16 MB	
	<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track</b>	0.2 ms
		<b>Average</b>	3.5 ms
		<b>Full-Stroke</b>	7.4 ms
	<b>Rotational Speed</b>	15,000 rpm	
	<b>Logical Blocks</b>	143,374,738 - 512 byte blocks	
	<b>Operating Temperature</b>	50° to 95° F (10° to 35° C)	
<b>146 GB</b>	<b>Capacity</b>	146,815,737,856 bytes	

## Technical Specifications - Hard Drives

(15K rpm)	<b>Height</b>	1.0 in (25.4mm)	
	<b>Width</b>	4.0 in (101.6mm)	
	<b>Interface</b>	SAS	
	<b>Synchronous Transfer Rate (Maximum)</b>	3.0 Gb/s	
	<b>Buffer</b>	16 MB	
	<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track</b>	0.2 ms
		<b>Average</b>	3.5 ms
		<b>Full-Stroke</b>	7.4 ms
	<b>Rotational Speed</b>	15,000 rpm	
	<b>Logical Blocks</b>	286,749,488 - 512 byte blocks	
	<b>Operating Temperature</b>	50° to 95° F (10° to 35° C)	

## Technical Specifications - Removable Storage

USB Disk on Key	Dimensions (HxWxD)	0.9 x 0.7 x 3.9 in (2.3 x 1.8 x 9.8 cm)
	Weight	0.05 lb (0.02 kg)
	USB Specification	2.0
	Transfer Rate	Read—1023 KB/Sec; Write—850 KB/Sec
	Storage Media	Solid state flash memory, no moving parts
	Power Supply	USB Bus-powered, no external power required
	Capacity	512 MB or 1 GB

## Technical Specifications - Peripherals

<b>HP IEEE 1394a FireWire 4-Port PCI Card</b> (Part# PA997A)	<b>Device Interface Protocol</b>	IEEE-1394a	
	<b>Data Rate</b>	400 Mbps	
	<b>Devices Supported</b>	IEEE-1394 compliant devices	
	<b>Bus Interface</b>	PCI	
	<b>Physical</b>	PCI card with brackets for low profile and full height PCI slots.	
	<b>Environmental</b>	<b>Operating temperature</b>	50° to 131° F (10° to 55° C)
		<b>Non-operating temperature</b>	-22° to 140° F (-30° to 60° C)
		<b>Relative humidity</b>	20% to 80%
	<b>Ports</b>	Two IEEE1394 6-Pin Connector (Rear)	
	<b>Connectors</b>	One 10-Pinches; 9 Contacts) Custom Connector (Internal)	
	<b>Minimum System Requirements</b>	Microsoft Windows Vista Business 32 and 64, Microsoft Windows XP Professional, Windows XP Home, not supported on Linux Pentium II 266 or above 128-MB RAM 1-GB Hard Drive CD-ROM drive Built-in sound system Available PCI slot	
	<b>Regulatory Agency Approval</b>	FCC Part 15B, cULus 60950, CE Mark EN55022B(1995)/EN55024-1998 STD, Taiwan BSMI CNS13438, Korea MIC	

<b>HP IEEE 1394b FireWire 800 3-Port PCI Card</b> (Windows XP Only) (Part# EA327AA)	<b>Device Interface Protocol</b>	IEEE-1394	
	<b>Data Rate</b>	800 Mbps	
	<b>Devices Supported</b>	IEEE-1394 compliant devices	
	<b>Bus Interface</b>	PCI	
	<b>Physical</b>	PCI card with brackets for low profile and full height PCI slots.	
	<b>Environmental</b>	<b>Operating temperature</b>	50° to 131° F (10° to 55° C)
		<b>Non-operating temperature</b>	-22° to 140° F (-30° to 60° C)
		<b>Relative humidity</b>	20% to 80%
	<b>Ports</b>	Two IEEE-1394b bilingual 9-Pin Connector (Rear)	
	<b>Connectors</b>	One 10-Pin header Custom Connector (Internal)	
	<b>Minimum System Requirements</b>	Microsoft Windows XP Professional, Windows XP Home, not supported on Linux Pentium III 128-MB RAM 1-GB Hard Drive CD-ROM drive Built-in sound system Available PCI slot	

### Technical Specifications - Peripherals

**Regulatory Agency Approval** FCC Part 15B, cULus 60950, CE Mark EN55022B(1995)/EN55024-1998 STD, Taiwan BSMI CNS13438, Korea MIC

PS/2 OR USB Standard Keyboard	Physical characteristics	<b>Keys</b>	104, 105, 106, 107, 109 layout (depending upon country)
		<b>Dimensions (L x W x H)</b>	18.0 x 6.4 x 0.98 inches ; 45.8 x 16.3 x 2.5 cm
	Electrical	<b>Weight</b>	2 lbs (0.9 kg) minimum
		<b>Operating voltage</b>	+ 5VDC $\pm$ 5%
		<b>Power consumption</b>	50-mA maximum (with three LEDs ON)
		<b>ESD</b>	CE level 4, 15-kV air discharge
		<b>EMI – RFI</b>	Conforms to FCC rules for a Class B computing device
	Mechanical	<b>Microsoft PC 99 – 2001</b>	Functionally compliant
		<b>Languages</b>	38 available
		<b>Keycaps</b>	Low-profile design
		<b>Switch actuation</b>	55-g nominal peak force with tactile feedback
		<b>Switch life</b>	20 million keystrokes (using Hasco modified tester)
		<b>Switch type</b>	Contamination-resistant switch membrane
		<b>Key-leveling mechanisms</b>	For all double-wide and greater-length keys
		<b>Cable length</b>	6 ft (1.8 m)
		<b>Microsoft PC 99 - 2001</b>	Mechanically compliant
		<b>Acoustics</b>	43-dBA maximum sound pressure level
	Environmental	<b>Operating temperature</b>	50° to 122° F (10° to 50° C)
		<b>Non-operating temperature</b>	-22° to 140° F (-30° to 60° C)
		<b>Operating humidity</b>	10% to 90% (non-condensing at ambient)
		<b>Non-operating humidity</b>	20% to 80% (non-condensing at ambient)
		<b>Operating shock</b>	40 g, six surfaces
		<b>Non-operating shock</b>	80 g, six surfaces
		<b>Operating vibration</b>	2-g peak acceleration
		<b>Non-operating vibration</b>	4-g peak acceleration
		<b>Drop (out of box)</b>	26 in (66 cm) on carpet, six-drop sequence
		<b>Drop (in box)</b>	42 in (107 cm) on concrete, 16-drop sequence
	<b>Operating system support</b>	Microsoft Windows Vista Business 32 or 64, Microsoft Windows XP Professional, Microsoft Windows XP Professional x64 Edition, Red Hat Enterprise Linux WS 3 and WS 4	
	<b>Approvals</b>	UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BSMI, C-Tick, MIC	
	<b>Ergonomic compliance</b>	ANSI HFS 100, ISO 9241-4, and TUVGS	
	<b>Kit contents</b>	Keyboard, keyboard software media, installation guide, warranty card, safety and comfort	

### Technical Specifications - Peripherals

HP USB Smart Card Keyboard (ED707AA)	Physical characteristics	Keys	104, 105, 106, 107, 109 layout (depending upon country)
		Form factor	USB basic Smart Card keyboard
		Colors	Carbonite/Silver
	Electrical	Dimensions (L x W x H)	18.2 x 6.3 x 1.3 in (46.3 x 16.1 x 3.3 cm)
		Weight	2 lb (0.9 kg) minimum
		Operating voltage	+ 5VDC $\pm$ 5%
		Power consumption	100-mA maximum (with four LEDs ON)
		System interface	USB Type A plug connector
	Mechanical	ESD	CE level 4, 15-kV air discharge
		EMI – RFI	Conforms to FCC rules for a Class B computing device
		Microsoft PC 99 – 2001	Functionally compliant
		Languages	30+ available
		Keycaps	Low-profile design
Switch actuation		55-g nominal peak force with tactile feedback	
Switch life		20 million keystrokes (using Hasco modified tester)	
Switch type		Contamination-resistant switch membrane	
Key-leveling mechanisms		For all double-wide and greater-length keys	
Cable length		6 ft (1.8 m)	
Environmental	Microsoft PC 99 - 2001	Mechanically compliant	
	Acoustics	43-dBA maximum sound pressure level	
	Operating temperature	50° to 122° F (10° to 50° C)	
	Non-operating temperature	-22° to 140° F (-30° to 60° C)	
	Operating humidity	10% to 90% (non-condensing at ambient)	
	Non-operating humidity	20% to 80% (non-condensing at ambient)	
	Operating shock	40 g, six surfaces	
	Non-operating shock	80 g, six surfaces	
	Operating vibration	2-g peak acceleration	
	Non-operating vibration	4-g peak acceleration	
SMARTCARD function	Drop (out of box)	26 in (66 cm) on carpet, six-drop sequence	
	Drop (in box)	42 in (107 cm) on concrete, 16-drop sequence	
	Support	All ISO 7816 smart cards	
	Interface	Reads from and writes to all ISO7816-1, 2, 3, 4 memory and microprocessor smart cards (T=0, T=1)	
	Chipset	SCM STCII	
	Standard APIs supported	PC/SC, EMV2000, SET	
	Power	USB Port Short circuit detection (protects smart card and reader)	



## Technical Specifications - Peripherals

		Power supply compliant with ISO7816 and EMV (5V, 60 mA)
		Supports 3-V and 5-V cards
<b>Power consumption</b>		250-mA maximum draw (50 mA for the keyboard with three LEDs ON and 200-mA maximum startup current using a high-current, 60-mA smart card)
<b>Communication</b>	<b>From card</b>	Programmable from 9,600 baud to 115,200 baud
	<b>From computer</b>	Up to 38,400 baud
<b>Landing mechanism</b>	<b>Contact device</b>	Friction contact
	<b>Card insertions rating</b>	Up to 100,000 insertion cycles
<b>Interface modes</b>		USB communications through USB port SCM protocol Automatic card insertion/removal detection
<b>Reader performance interface</b>		USB connection
<b>Electro-magnetic standards</b>	<b>Europe</b>	89/336/CEE guideline
	<b>USA</b>	USAFCC part 15
<b>Operating system support</b>	Microsoft Windows Vista Business 32 or 64, Microsoft® Windows® 2000, Windows XP Home, Windows XP Professional, xpe, ce.net, Linux, XP-64	
<b>Approvals</b>	CE-Mark, UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BSMI, C-Tick, MIC, JITC, EMV2000, USB-IF	
<b>Ergonomic compliance</b>	ANSI HFS 100, ISO 9241-4, TUVGS	
<b>Kit contents</b>	Keyboard, I/O Security and Documentation CD, , warranty card	
<b>Smart card compatibility</b>	<b>HP</b>	HP ProtectTools Smart Card
	<b>American Express</b>	Amex Blue
	<b>Axalto (Schlumberger)</b>	Cryptoflex 8K Cryptoflex 16K Cryptoflex 32K Cryptoflex 32K e-gate Cyberflex Access 64K Cyberflex Access 32K Cyberflex 32K e-gate Cyberflex 64K Cyberflex Palmera Payflex-S Payflex 1K Payflex 2K Payflex 4K Payflex 8K Prismera US DoD CAC

## Technical Specifications - Peripherals

Cardlogix	CLXSU004KK4 CLXSU008KK5
Safenet, Inc.	Model 300 Model 330
De La Rue	VisaCash
Gemplus	Gem Expresso GKK32K Gemclub Memo GemClub Micro GemXplore GemSafe
Infineon	SLE66C322P
SafLink (Litronic)	Forte
Sharp	Java Card
Oberthur	CosmopolIIC v4 CosmopolIIC v4.1 Cosmo ID-One GalatIIC v2.1 US DoD CAC
Memory Cards	
Atmel	AT24C01ASC AT24C02SC AT24C04SC AT24C08SC AT24C16SC AT24C32SC AT24C64SC AT24C128SC AT24C256SC AT24C512SC AT88SC153 AT88SC1608
Axalto (Schlumberger)	PrimeFlex Store 8K PrimeFlex Store 2K
nfineon	SLE4406 SLE4406E SLE4406E SE SLE4418 SLE4428 SLE4432 SLE4436E SLE4442 SLE5536
ISSI	IS23SC4418 IS23SC4428
ST	14C02

## Technical Specifications - Peripherals

Telefonkarte	SLE4406 SLE4436 SLE5536
XICOR	X24026

HP 2-Button Scroll Mouse (PS/2)	Scroll Wheel	8 mm		
	Maximum Rotation Speed	30 mm/s		
	Switch Type	Light force micro-switch		
	Switch Life	1 million operations		
	Mechanical Life	Minimum 200,000 revolutions		
	Environmental	Operating temperature	50° to 122° F (10° to 50° C)	
		Non-operating temperature	-22° to 140° F (-30° to 60° C)	
		Operating humidity	10% to 90% (non-condensing at ambient)	
		Non-operating humidity	20% to 80% (non-condensing at ambient)	
		Operating shock	40 g, 6 surfaces	
		Non-operating shock	80 g, 6 surfaces	
		Operating vibration	2 g peak acceleration	
		Non-operating vibration	4 g peak acceleration	
		Mechanical	Resolution	400 ± 20% DPI
			Tracking speed	10 in/s maximum
	Acceleration		100 in/s	
	Switch actuation		85 g nominal peak force	
Switch life	1,000,000 operations (using Hasco modified tester)			
Regulatory approvals	Cable length	6 ft (1.8 m)		
	PC98-99	Mechanically compliant		
		UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BCIQ, C-Tick		

HP 2-button Optical Scroll Mouse (USB)	Dimensions (H x L x W)	1.5 x 4.5 x 2.5 inches; 3.8 x 11.6 x 6.3 cm
	Weight	0.27 lb (0.12 kg)
	Cable length	72.8 inches; 185 cm
	System requirements	Microsoft Windows Vista Business 32 or 64, Microsoft Windows XP, Red Hat Enterprise Linux WS 3, Red Hat Enterprise Linux WS 4

## Technical Specifications - Peripherals

HP Optical 3-Button Mouse (USB)	Dimensions/Weight	Height	1.5 inches; 3.6 cm
		Length	4.5 inches; 11.56 cm
		Width	2.2 inches; 6.19 cm
	Environmental	Weight	3.80 oz (108 g)
		Operating temperature	32° to 104° F (0° to 40° C)
		Non-operating temperature	-4° to 140° F (-20° to 60° C)
		Operating humidity	10% to 90% (non condensing at ambient)
	Mechanical	Tracking speed	6 in/s Maximum
		Switch life	3,000,000 operations
		Switch type	Micro-switches
		Tracking mechanism life	155 miles (250 km) at average speed of 10 in/s
		Cable length	6 feet; 1.8 m

HP SpacePilot (USB – Windows XP Only)	Physical Characteristics	Dimensions (L x W x H)	9.3 x 5.6 x 2.0 inches; 236 x 143 x 53 mm
		Weight	1.875 lb (0.85 kg)
		Palmrest	Sculpted
	Mechanical	Buttons	21+ programmable speed keys 15 reprogrammable
		LCD Viewing Area (W x H)	4.0 x 1.0 inches; 102.4 x 30.2mm
		Active Area (W x H)	3.7 x 1.0 inches; 93.4 x 26.2mm
		Display Format	240 x 64
		Motion Controller	Six degrees of freedom motion control through the X, Y, Z axis (pitch, roll, yaw)
		Device Sensitivity	Adjustable to preference
		System Requirements	USB 1.1 or 2.0
	Operating System Supported	Microsoft Windows XP, not supported in Linux	
	Regulatory Approvals	FCC, CE	

HP SpaceExplorer (USB - Windows Only)	Physical Characteristics	Dimensions (L x W x H)	7.6 x 5.4 x 2.3 in (194 x 139 x 58mm)
		Weight	1.36 lbs (0.62 kg)
		Palmrest	Sculpted
	Mechanical	Buttons	15 reprogrammable speed keys
		Motion Controller	Six degrees of freedom motion control through the X, Y, Z axis (pitch, roll, yaw)
		Device Sensitivity	Adjustable to preference
	System Requirements	USB 1.1 or 2.0	
	Operating System Supported	Microsoft Windows Vista Business 32 and 64, Microsoft Windows XP, not supported in Linux	
	Regulatory Approvals	FCC, CE	

## Technical Specifications - Optical Devices

<b>16X/40X DVD-ROM Drive Height with +R Read Support</b>		5.25-in, half-height, tray load
<b>Interface Type</b>		ATAPI/EIDE
<b>Dimensions (W x H x D)</b>		5.88 x 1.71 x 7.87 [max] inches; 149.5 x 43.25 x 200.0 [max] mm (external, excluding bezel)
<b>Disc Formats</b>		DVD-ROM (single and dual layer); DVD-video; DVD-R version 1.0 and 2.0; DVD-RW version 1.0 and 1.1; DVD-R multi-border; DVD+RW; DVD+R ; CD-ROM Mode 1 and 2; CD-DA; CD-ROM XA Mode 2, Form 1 and 2; CD-extra; CD-text; CD-I Mode 2, Form 1 and 2; CD-I ready; video CD, CD-bridge; PhotoCD (single and multi-session); CD-R; CD-RW
<b>Disc Capacity</b>	<b>DVD-ROM</b>	4.7 GB (DVD-5), 8.54 GB (DVD-9), 9.4 GB (DVD-10), 3.95 GB (DVD-R version 1.0), 4.7 GB (DVD-R version 2.0), 4.7 GB (DVD-RW version 1.0 and 1.1), 4.7 GB (DVD+RW), 4.7G (DVD+R)
	<b>CD-ROM</b>	540 MB (Mode 1, 12 cm), 640 MB (Mode 2, 12 cm), 700 MB (80 minimum CD-R and CD-RW), 180 MB (8 cm)
<b>Access Times (typical reads, including settling)</b>	<b>DVD-ROM Single Layer</b>	120 ms
	<b>CD-ROM Mode 1</b>	90 ms
	<b>Full Stroke DVD</b>	240 ms (seek)
	<b>Full Stroke CD</b>	160 ms (seek)
	<b>Startup Time</b>	< 10 seconds (typical)
	<b>Stop Time</b>	< 4 seconds
	<b>Data Transfer Modes</b>	PIO Mode 4 (16.6 MB/s); Multi-word DMA mode 2 (16.6 MB/s); UltraDMA Mode 3 (44.4 MB/s)
<b>Maximum Data Transfer Rates</b>	<b>CD-ROM Read</b>	6000 KB/s (40X) Max
	<b>DVD-ROM Read</b>	21,600 KB/s (16X) Max
	<b>Digital Audio Extraction</b>	6000 KB/s (40X) Max
<b>Power</b>	<b>Source</b>	Four-pin, DC power receptacle
	<b>DC Power Requirement</b>	5 VDC $\pm$ 5% – 100 mV ripple p-p 12 VDC $\pm$ 5% – 200 mV ripple p-p
	<b>DC Current</b>	5 VDC – <800 mA typical, < 1000 mA maximum 12 VDC – < 870 mA typical, <1800 mA maximum
<b>Audio Output</b>	<b>Line-Out</b>	0.7 VRMS
	<b>Signal-to-Noise Ratio</b>	85 dB
	<b>Channel Separation</b>	65 dB
<b>Configuration Jumper Block</b>		Master, slave, and cable select modes
<b>Data Interface Connector</b>		40-pin, shrouded and keyed, flat ribbon

### Technical Specifications - Optical Devices

<b>Operating Environmental</b> (all conditions non-condensing)	<b>Temperature</b> (operating)	41° to 122° F (5° to 50° C)
	<b>Relative Humidity</b> (operating)	10% to 85%
	<b>Maximum Wet Bulb Temperature</b> (operating)	86° F (30° C)
<b>Certifications, Approvals</b>	MMC II support, multi-read certification, Microsoft WHQL certification, ACA AS/NZS 3548 class B, CNS 13438, C.I.S.P.R. Pub 22, TUV or VDE EN60950, EN 55022, EN55024, EMKO EN60950, EN 60825-1, UL 60950, CSA C22.2 60950-2000, CFR 21 part 1040 class 1, CFR 47 C.I.S.P.R. Pub 22 Class B, DHHS/FDA, ANSI C63.4-1992	
<b>Operating Systems Supported</b>	Microsoft Windows Vista Business 32 and 64, Windows XP Professional, and XP Professional x64 Edition, Red Hat Enterprise Linux WS 3, Red Hat Enterprise Linux WS 4	
<b>Kit Contents</b>	16X/40X DVD-ROM Drive, Intervideo WinDVD, audio cable, and installation guide	

<b>HP 48X SATA CD-RW/DVD-ROM Combo Drive</b>	<b>Form Factor</b>	5.25-inch, half-height, tray-load		
	<b>Orientation</b>	Either horizontal or vertical		
	<b>Interface type</b>	SATA/ATAPI		
	<b>Disc capacity</b>	Single layer: Up to 4.7 GB (6 times capacity of CD-ROM) Double layer: Up to 8.5 GB (12 times capacity of CD-ROM)		
	<b>Dimensions (W x H x D)</b>	5.9 x 1.7 x 8.0 in (15.0 x 4.4 x 20.3 cm)		
	<b>Weight (max)</b>	2.6 lb (1.2 kg)		
	<b>Write speed</b>	<b>CD-R</b>	Up to 48X	
		<b>CD-RW</b>	Up to 32X	
		<b>DVD+R/-R/+RW/-RW/+R DL /-R DL</b>	Up to 8X	
	<b>Read speeds</b>	<b>DVD-ROM</b>	Up to 16X	
		<b>CD-ROM, CD-R</b>	Up to 48X	
		<b>CD-RW</b>	Up to 32X	
	<b>Buffer Size</b>	1.5MB (Min)		
	<b>Access times</b> (typical reads, including setting)	<b>Random</b>	DVD: < 140 ms (typical), CD: < 125 ms (typical)	
		<b>Full Stroke</b>	DVD: < 250 ms (seek), CD: < 210 ms (seek)	
	<b>Power</b>	<b>Source</b>	SATA DC power receptacle	
<b>DC Power Requirement</b>		5 VDC ± 5%-100 mV ripple p-p 12 VDC ± 5%-200 mV ripple p-p		
<b>DC Current</b>		5 VDC - <1000 mA typical, < 1600 mA maximum 12 VDC - < 600 mA typical, < 1400 mA maximum		
<b>Total Drive Power</b> (standby mode)		< 2.5 Watt		

## Technical Specifications - Optical Devices

<b>Environmental</b> (all conditions non-condensing)	<b>Temperature</b> (operating)	41° to 122° F (5° to 50° C)
	<b>Relative Humidity</b> (operating)	10% to 90%
<b>Operating Systems Supported</b>	<b>Maximum Wet Bulb Temperature</b> (operating)	86° F (30° C)
		Windows Vista Business 64*, Windows Vista Home Basic 32*, Windows 2000, Windows XP Professional or Windows XP Home 32*, Red Hat Linux WS 4, 32/64-bit OS. No driver is required for this device. Native support is provided by the operating system.
		* Certain Windows Vista product features require advanced or additional hardware. Windows Vista Upgrade Advisor can help you determine which features of Windows Vista will run on your computer. To download the tool, visit <a href="http://www.windowsvista.com/upgradeadvisor">http://www.windowsvista.com/upgradeadvisor</a> . For Windows Vista system requirements, visit <a href="http://www.windowsvista.com/systemrequirements">http://www.windowsvista.com/systemrequirements</a> .
<b>Option kit contents</b>		HP 48X Max SATA CD-RW/DVD-ROM Combo Drive, Roxio Easy Media Creator version 9, Intervideo WinDVD, CD-R media, high-speed CD-RW media, and installation guide.

<b>HP 16X Max SATA DVD+/-RW LightScribe Drive</b>	<b>Form Factor</b>	5.25-inch, half-height, tray-load		
	<b>Orientation</b>	Either horizontal or vertical		
	<b>Interface type</b>	SATA/ATAPI		
	<b>Disc capacity</b>	8.5 GB DL or 4.7 GB standard		
	<b>Dimensions</b> (W x H x D)	5.9 x 1.7 x 8.0 in (15.0 x 4.4 x 20.3 cm)		
	<b>Weight</b> (max)	2.6 lb (1.2 kg)		
	<b>Write speed</b>	<b>DVD+R</b>	Up to 16X	
		<b>DVD+RW</b>	Up to 8X	
		<b>DVD+R DL</b>	Up to 8X	
		<b>DVD-R DL</b>	Up to 4X	
		<b>DVD-R</b>	Up to 16X	
		<b>DVD-RW</b>	Up to 6X	
		<b>DVD-RAM</b>	Up to 12X	
		<b>CD-R</b>	Up to 48X	
<b>CD-RW</b>		Up to 32X		
<b>Read speeds</b>		<b>DVD-RAM</b>	Up to 12X	
	<b>DVD+RW, DVD-RW, DVD+R DL, DVD-R DL</b>	Up to 8X		
	<b>DVD-ROM, DVD+R, DVD-R</b>	Up to 16X		
	<b>CD-ROM, CD-R</b>	Up to 48X		
	<b>CD-RW</b>	Up to 32X		
<b>Access times</b> (typical reads, including setting)	<b>Random</b>	DVD: < 130 ms (typical), CD: < 120 ms (typical)		
	<b>Full Stroke</b>	DVD: < 240 ms (seek), CD: < 200 ms (seek)		

## Technical Specifications - Optical Devices

<b>Power</b>	<b>Source</b>	SATA DC power receptacle
	<b>DC Power Requirement</b>	5 VDC $\pm$ 5%-100 mV ripple p-p 12 VDC $\pm$ 5%-200 mV ripple p-p
	<b>DC Current</b>	5 VDC - <1000 mA typical, < 1600 mA maximum 12 VDC - < 600 mA typical, < 1400 mA maximum
	<b>Total Drive Power (standby mode)</b>	< 2.5 Watt
<b>Environmental</b> (all conditions non-condensing)	<b>Temperature (operating)</b>	41° to 122° F (5° to 50° C)
	<b>Relative Humidity (operating)</b>	10% to 90%
	<b>Maximum Wet Bulb Temperature (operating)</b>	86° F (30° C)
<b>Operating Systems Supported</b>	Microsoft Windows Vista Business 32 or 64, Microsoft Windows XP Professional, Microsoft Windows XP Professional x64 Edition, Red Hat Enterprise Linux 4 & 5 Desktop No driver is required for this device. Native support is provided by the operating system.	
<b>Option kit contents</b>	* Certain Windows Vista product features require advanced or additional hardware. Windows Vista Upgrade Advisor can help you determine which features of Windows Vista will run on your computer. To download the tool, visit <a href="http://www.windowsvista.com/upgradeadvisor">http://www.windowsvista.com/upgradeadvisor</a> . For Windows Vista system requirements, visit <a href="http://www.windowsvista.com/systemrequirements">http://www.windowsvista.com/systemrequirements</a> . HP 16X DVD+-RW SuperMulti LightScribe drive, LightScribe software, Roxio Easy Media Creator version 9, Intervideo WinDVD Software, installation guide, and DVD+R media. Software is Microsoft Windows only.	



## Technical Specifications - Graphics

<b>NVIDIA Quadro NVS 285, 128 MB Dual Head (Part# RDO69AA)</b>	<b>Form Factor</b>	Low profile, both ATX and low profile brackets included
	<b>Graphics Controller</b>	Integrated Quadro 285 2D graphics processor unit (GPU)
	<b>Bus Type</b>	PCIe
	<b>RAMDAC</b>	Dual 350 MHz (integrated)
	<b>Memory</b>	128 MB DDR (64 MB local frame buffer plus 64 MB of shared system memory via TurboCache technology) <b>NOTE:</b> The graphics card uses part of the total system memory (RAM) for graphics performance. System memory dedicated to graphics performance is not available for other use by other programs.
	<b>Connectors</b>	DVI DMS-59 to dual DVI Y-cable and DMS-59 to dual-VGA Y-cable
	<b>Dimensions</b>	Low-profile, 2.586 x 6.6 inches; 6.57 x 16.76 cm
	<b>Controller clock speed</b>	250 MHz
	<b>Color depth</b>	32 bits/pixel max
	<b>Overlay planes</b>	One 16-bit Video overlay plane
	<b>Maximum pixel clock</b>	350 MHz
	<b>Multi-monitor support</b>	Dual analog or digital monitors
	<b>Single DVI Support</b>	Yes
	<b>Dual DVI Support</b>	Yes
	<b>High-definition Video Processor (HDVP)</b>	Full screen, full frame video playback of HDTV and DVD content DVD-ready motion compensation for MPEG-2 Independent hardware color controls for video overlay Hardware color-space conversion (YUV 4:2:2 and 4:2:0) IDCT motion compensation 5-tap horizontal by 3-tap vertical filtering 8:1 up/down scaling
	<b>Available graphics drivers</b>	Microsoft Windows Vista Business 32 and 64, Microsoft Windows XP (Provides full native Dual View mode, Span or Big Desktop mode, and Clone mode), Graphics drivers for Red Hat Enterprise Linux WS 3, and Red Hat Enterprise Linux WS 4 HP qualified drivers may be preloaded or available from the HP support Web site: <a href="http://www.hp.com/country/us/en/support.html?pageDisplay=drivers">http://www.hp.com/country/us/en/support.html?pageDisplay=drivers</a>

## Technical Specifications - Graphics

Analog Resolution	Maximum Colors Supported	Maximum Refresh Rate
640 x 480	16.7 M	240 Hz
800 x 600	16.7 M	240 Hz
1024 x 768	16.7 M	240 Hz
1152 x 864	16.7 M	170 Hz
1280x1024	16.7 M	150 Hz
1600 x 1200	16.7 M	100 Hz
1920 x 1080	16.7 M	85 Hz
1920 x 1200	16.7 M	85 Hz
1920 x 1440	16.7 M	75 Hz
2048 x 1536	16.7 M	60 Hz
Digital Resolution	Maximum Colors Supported	Maximum Refresh Rate
640 x 480	16.7 M	75 Hz
800 x 600	16.7 M	75 Hz
1024 x 768	16.7 M	75 Hz
1152 x 864	16.7 M	60 Hz
1280 x 1024	16.7 M	60 Hz
1600 x 1200	16.7 M	60 Hz
1900 x 1200	16.7 M	60 Hz

NVIDIA Quadro NVS 440, 256 MB Quad Head  
(Part# PT453AA)

Form Factor	ATX
Graphics Controller	2 nv43 2D graphics processor units (GPUs)
VGA controller	Integrated into the Quadro GPU
Bus Type	PCI-E x16
RAMDAC	Dual 350 MHz
Memory	256 MB DDR frame buffer and Texture storage (128MB per GPU)
Connector	Two DMS-59
Controller clock speed	250 MHz
Color planes	32-bit color buffer
Overlay planes	1 16-bit Video overlay plane
Maximum pixel clock	350 MHz
Multi-Monitor Support	Up to 4 analog or digital monitors
Single DVI Support	Yes
Dual DVI Support	Yes
High-definition Video Processor (HDVP)	32-Bit color 2048 x 1536 @ 60 Hz maximum resolution 2D rendering engine optimized for 32-, 24-, 16-, 15-, and 8-bpp modes
High-definition Video Processor (HDVP)	Full-screen, full-frame video playback of HDTV and DVD content DVD-ready motion compensation for MPEG-2 Independent hardware color controls for video overlay Hardware color-space conversion (YUV 4:2:2 and 4:2:0) IDCT motion compensation 5-tap horizontal by 3-tap vertical filtering 8:1 up/down scaling

### Technical Specifications - Graphics

**Available graphics drivers** Microsoft Windows XP (Provides full native Dual View mode, Span or Big Desktop mode, and Clone mode )  
HP qualified drivers may be preloaded or available from the HP support Web site:

[http://welcome.hp.com/country/us/eng/software\\_drivers.html](http://welcome.hp.com/country/us/eng/software_drivers.html).

**\*NOTE:** Graphics card uses "reduced blanking" timing and may not work with all panels at this resolution.

---

NVIDIA Quadro FX 560, 128 MB (Part# ES354AA)	<b>Form Factor</b>	ATX
	<b>Graphics Controller</b>	NVIDIA NV73GL
	<b>Bus Type</b>	PCI-Express x16
	<b>Memory</b>	128 MB 600 MHz GDDR3 SDRAM unified frame buffer, Z-buffer and Texture storage
	<b>Connectors</b>	2 DVI-I + 9-pin HDTV output
	<b>Display resolution support</b>	Dual integrated analog display controllers supporting up to two analog displays at 2048x1536 @ 85Hz on both displays or dual digital displays at 1920x1200 (single-link) and 3840x2400 (dual-link). NVIEW advanced multi-display desktop and application management seamlessly integrated into Microsoft Windows
	<b>RAMDAC</b>	Dual 400 MHz integrated
	<b>Architecture features</b>	128-bit memory interface 128-bit IEEE floating-point precision graphics pipeline 128-bit color precision 12-bit sub-pixel precision 8x FSAA at 1920x1200, 4x at 2048x1536, rotated grid FSAA sampling algorithm Hardware accelerated antialiased points and lines Hardware OpenGL overlay planes Hardware accelerated two-sided lighting Hardware accelerated clipping planes 3rd generation occlusion culling 3D volumetric texture support Quad-buffered stereo Single Link DVI enabling driving digital displays up to 1920x1200 (60Hz)
	<b>Shading architecture</b>	Fully programmable GPU Long fragment programs (up to 65,536 instructions) Long vertex programs (up to 65,536 instructions) Looping and subroutines (up to 256 loops per vertex program) Dynamic flow control Conditional execution
	<b>Supported graphics APIs</b>	OpenGL 2.0 DirectX 9.0
<b>Available graphics drivers</b>	Microsoft Windows Vista Business 32 and 64, Microsoft Windows XP Professional, Linux - Full Open GL implementation, complete with NVIDIA and ARB extensions. Qualified drivers may be preloaded or available from the HP support Web site: <a href="http://welcome.hp.com/country/us/eng/software_drivers.html">http://welcome.hp.com/country/us/eng/software_drivers.html</a> .	

### Technical Specifications - Graphics

<b>Maximum Resolution</b>	Dual DVI-I output - drives dual digital displays at resolutions up to 1920x1200 @ 60Hz. Internal 400MHz RAMDACs - drives dual analog displays up to 2048x1536 @ 75Hz each
---------------------------	--

---

<b>NVIDIA Quadro FX 1500, Form Factor</b>	ATX
<b>256 MB</b>	
<b>(Part# ES355AA)</b>	
<b>Bus Type</b>	PCI Express x16
<b>Memory</b>	256 MB 625 MHz GDDR3 SDRAM unified frame buffer, Z-buffer and Texture storage
<b>Connectors</b>	2 dual-link DVI-I + 9-pin HDTV output
<b>Display resolution support</b>	Dual integrated analog display controllers supporting up to two analog displays at 2048x1536 @ 85Hz on both displays or dual digital displays at 1920x1200 (single-link) and 3840x2400 (dual-link). NVIEW advanced multi-display desktop and application management seamlessly integrated into Microsoft Windows
<b>RAMDAC</b>	Dual 400 MHz integrated
<b>Architecture features</b>	256-bit memory interface 128-bit IEEE floating-point precision graphics pipeline 128-bit color precision 12-bit sub-pixel precision 8x FSAA at 1920x1200, 4x at 2048x1536, rotated grid FSAA sampling algorithm Hardware accelerated antialiased points and lines Hardware OpenGL overlay planes Hardware accelerated two-sided lighting Hardware accelerated clipping planes 3rd generation occlusion culling 3D volumetric texture support Quad-buffered stereo Dual Link DVI enabling driving digital displays up to 3840x2400 (24Hz)
<b>Shading architecture</b>	Fully programmable GPU Long fragment programs (up to 65,536 instructions) Long vertex programs (up to 65,536 instructions) Looping and subroutines (up to 256 loops per vertex program) Dynamic flow control Conditional execution
<b>Supported graphics APIs</b>	OpenGL 2.0 DirectX 9.0
<b>Available graphics drivers</b>	Microsoft Windows Vista Business 32 and 64, Microsoft Windows XP Professional, Linux - Full Open GL implementation, complete with NVIDIA and ARB extensions. Qualified drivers may be preloaded or available from the HP support Web site: <a href="http://welcome.hp.com/country/us/eng/software_drivers.html">http://welcome.hp.com/country/us/eng/software_drivers.html</a> .
<b>Maximum Resolution</b>	Dual DVI-I output – drives dual digital displays at resolutions up to 1920x1200 @ 60Hz (single-link) and 3840x2400 @ 24Hz (dual-link). Internal 400 MHz RAMDACs – drives dual analog displays up to 2048x1536 @ 75Hz each

## Technical Specifications - Graphics

<p>ATI FireGL V7200, 256 MB (Part# ES356AA)</p>	<p>Form factor Bus type RAMDAC Memory Connectors Display resolution support</p>	<p>ATX PCI-Express x16 Dual 10-bit per channel 400 MHz 256 MB GDDR3 graphics memory with unified frame buffer, Z-buffer and Texture storage and a 512-bit Ring-Bus memory controller Dual DVI-I analog/digital, dual VGA analog support with DVI-to-VGA adapters. The DVI-I digital connectors are Dual Link capable. Stereoscopic 3D output connector with quad buffer support, HD Component Video (YPrPb) output with optional adapter. Analog support for 2048x1536 @ 85Hz on each output connector. Digital support for 1920 x1200 @ 60Hz on each output connector. Dual Link digital support for 2560 x 1600 @ 60Hz. Ideal for 30-inch widescreen displays. <b>NOTE:</b> Stereo supported on single display only.</p>
	<b>Additional product features</b>	
<p>Ring Bus memory controller Image quality features</p>		<ul style="list-style-type: none"> <li>● 512-bit internal ring bus for highly efficient memory reads</li> <li>● Programmable intelligent arbitration logic</li> <li>● 2x/4x/6x Anti-aliasing modes; multi-sample algorithm with gamma correction, programmable sparse sample patterns, and centroid sampling</li> <li>● 2x/4x/8x/16x Anisotropic Filtering modes; up to 128-tap texture filtering</li> <li>● High resolution texture support (up to 4K x 4K)</li> <li>● Hardware supported overlays, antialiased points and lines, 2 sided lighting, occlusion culling</li> </ul>
<p>Avivo video and display platform</p>		<ul style="list-style-type: none"> <li>● 64-Bit per pixel floating point HDR supported throughout the pipeline, includes support for blending and multi-sample anti-aliasing</li> <li>● 32-Bit integer HDR (10:10:10:2) format supported throughout the pipeline, includes support for blending and multi-sample anti-aliasing</li> </ul>
<p>Programmable video processor</p>		<ul style="list-style-type: none"> <li>● Accelerated MPEG-2, MPEG-4, DivX, WMV9, VC-1 and H.264 decoding and transcoding</li> <li>● Seamless pixel shader integration with video in real-time</li> </ul>
<p>Display output</p>		<ul style="list-style-type: none"> <li>● 16-bit per channel floating point HDR and 10 bit per channel DVI output</li> <li>● Programmable piecewise linear gamma correction, color correction, and color space conversion (10-bits per color)</li> <li>● Complete independent color controls and video overlays for each display</li> <li>● High quality pre- and post-scaling engines with underscan support for all outputs</li> <li>● Content-adaptive de-flicker filtering for interlaced displays</li> <li>● Xilleon TV encoder for high quality analog support</li> <li>● Spatial/temporal dithering enables 10-bit color quality on 8 and 6-bit displays</li> <li>● VGA mode support on all outputs</li> </ul>
<p>Shader Engine</p>		<ul style="list-style-type: none"> <li>● Supports Microsoft DirectX 9.0 Shader Model 3.0 programmable vertex and pixel shaders in hardware</li> </ul>

## Technical Specifications - Graphics

- Full speed 128-bit floating point processing for all shader operations
- Dedicated branch-execution units for high performance dynamic branching and flow control
- Dedicated texture address units for improved efficiency
- Up to 512 simultaneous pixel threads
- Multiple Render Target (MRT) support
- Render to vertex buffer support

**Supported graphics APIs** OpenGL 2.0, Microsoft DirectX 9.0

**Available graphics drivers** HP-tested Windows XP  
 Microsoft Windows Vista Business 32 and 64,  
 HP-tested Linux  
 HP qualified drivers may be preloaded or available from the HP support web site:  
[http://h20000.www2.hp.com/bizsupport/TechSupport/Product.jsp?prodTypeId=12454&prodCatId=296719&locale=en\\_US&taskId=135](http://h20000.www2.hp.com/bizsupport/TechSupport/Product.jsp?prodTypeId=12454&prodCatId=296719&locale=en_US&taskId=135)

**ATI FireGL™ V3350**  
 (Part# RV705AA)

**Form Factor** ATX

**Graphics Controller** RV515

**Bus Type** PCI-Express x16

**Memory** 256 MB DDR unified frame buffer, Z-buffer and Texture storage

**Connectors** Dual DVI-I analog/digital, dual VGA analog support with DVI-to-VGA adapters.

**Display resolution support** Analog support for 2048x1536 @ 85Hz on each output connector.  
 Digital support for 1920x1200 @ 60Hz on each output connector.

**RAMDAC** Dual 10-bit per channel 400MHz

**Image quality features** 2x/4x/6x Anti-aliasing modes; multi-sample algorithm with gamma correction, programmable sparse sample patterns, and centroid sampling  
 2x/4x/8x/16x Anisotropic Filtering modes; up to 128-tap texture filtering  
 High resolution texture support (up to 4K x 4K)  
 Hardware supported overlays, anti-aliased points and lines, 2 sided lighting, occlusion culling

**Architecture Features** 256-bit memory interface  
 128-bit IEEE floating-point precision graphics pipeline  
 128-bit color precision  
 12-bit sub-pixel precision  
 8x FSAA at 1920x1200, 4x at 2048x1536, rotated grid FSAA sampling algorithm  
 Hardware accelerated antialiased points and lines  
 Hardware OpenGL overlay planes  
 Hardware accelerated two-sided lighting  
 Hardware accelerated clipping planes  
 3rd generation occlusion culling  
 3D volumetric texture support  
 Quad-buffered stereo  
 Dual Link DVI enabling driving digital displays up to 3840x2400 (24Hz)  
 SLI Link

## Technical Specifications - Graphics

<b>Avivo video and display platform</b>	64-bit per pixel floating point HDR supported throughout the pipeline, includes support for blending and multi-sample anti-aliasing 32-bit integer HDR (10:10:10:2) format supported throughout the pipeline, includes support for blending and multi-sample anti-aliasing
<b>Programmable video processor</b>	Accelerated MPEG-2, MPEG-4, DivX, WMV9, VC-1 and H.264 decoding and transcoding Seamless pixel shader integration with video in real-time
<b>Display output</b>	16-bit per channel floating point HDR and 10 bit per channel DVI output Programmable piecewise linear gamma correction, color correction, and color space conversion (10-bits per color) Complete independent color controls and video overlays for each display High quality pre- and post-scaling engines with underscan support for all outputs Content-adaptive de-flicker filtering for interlaced displays Spatial/temporal dithering enables 10-bit color quality on 8 and 6-bit displays VGA mode support on all outputs
<b>Shading architecture</b>	Supports Microsoft DirectX 9.0 Shader Model 3.0 programmable vertex and pixel shaders in hardware Full speed 128-bit floating point processing for all shader operations Dedicated branch-execution units for high performance dynamic branching and flow control Dedicated texture address units for improved efficiency Up to 128 simultaneous pixel threads Multiple Render Target (MRT) support Render to vertex buffer support
<b>Supported graphics APIs</b>	OpenGL 2.0 DirectX 9.0
<b>Available graphics drivers</b>	Microsoft Windows Vista Business 32 and 64, Microsoft Windows XP Professional qualified drivers may be preloaded or available from the HP support Web site: <a href="http://welcome.hp.com/country/us/eng/software_drivers.html">http://welcome.hp.com/country/us/eng/software_drivers.html</a> . HP-tested Windows XP and Linux

## Technical Specifications - Graphics

NVIDIA Quadro FX 3500, Form Factor 256 MB (Part# ES357AA)	ATX
<b>Bus Type</b>	PCI-Express x16
<b>Memory</b>	256 MB 700 MHz GDDR3 SDRAM unified frame buffer, Z-buffer and Texture storage
<b>Connectors</b>	2 dual-link DVI-I + 3-pin Mini DIN stereo output
<b>Display resolution support</b>	Dual integrated analog display controllers supporting up to two analog displays at 2048x1536 @ 85Hz on both displays or dual digital displays at 1920x1200 (single-link) and 3840x2400 (dual-link). NVIEW advanced multi-display desktop and application management seamlessly integrated into Microsoft Windows
<b>RAMDAC</b>	Dual 400 MHz integrated
<b>Architecture Features</b>	256-bit memory interface 128-bit IEEE floating-point precision graphics pipeline 128-bit color precision 12-bit sub-pixel precision 8x FSAA at 1920x1200, 4x at 2048x1536, rotated grid FSAA sampling algorithm Hardware accelerated antialiased points and lines Hardware OpenGL overlay planes Hardware accelerated two-sided lighting Hardware accelerated clipping planes 3rd generation occlusion culling 3D volumetric texture support Quad-buffered stereo Dual Link DVI enabling driving digital displays up to 3840x2400 (24Hz) SLI Link
<b>Shading Architecture</b>	Fully programmable GPU Long fragment programs (up to 65,536 instructions) Long vertex programs (up to 65,536 instructions) Looping and subroutines (up to 256 loops per vertex program) Dynamic flow control Conditional execution
<b>Supported Graphics APIs</b>	OpenGL 2.0 DirectX 9.0
<b>Available Graphics Drivers</b>	Microsoft Windows Vista Business 32 and 64, Microsoft Windows XP Professional; Linux - Full Open GL implementation, complete with NVIDIA and ARB extensions. Qualified drivers may be preloaded or available from the HP support Web site: <a href="http://welcome.hp.com/country/us/eng/software_drivers.html">http://welcome.hp.com/country/us/eng/software_drivers.html</a> .
<b>Maximum Resolution</b>	Dual DVI-I output – drives dual digital displays at resolutions up to 1920x1200 @ 60Hz (single-link) and 3840x2400 @ 24Hz (dual-link). Internal 400MHz RAMDACs – drives dual analog displays up to 2048x1536 @ 75Hz each

---

NVIDIA Quadro FX 4600 (768 MB)	<b>Graphics controller</b>	NVIDIA Quadro FX 4600 Workstation GPU
	<b>Bus Type</b>	PCI Express x16
	<b>RAMDAC</b>	Dual 400 MHz integrated



### Technical Specifications - Graphics

<b>Memory</b>	768 MB GDDR3 SDRAM unified graphics memory
<b>Connectors</b>	2 Dual-Link DVI-I analog/digital monitor outputs, 1 3-pin Mini DIN stereo output, DVI-I to VGA adapters included
<b>Multi-monitor Support</b>	Dual integrated display controllers supporting up to to 2560x1600 @ 60Hz (both analog and digital) on both displays
<b>NVIDIA Quadro FX 4600 Architecture</b>	384-bit memory interface 67.2 GB/sec. memory bandwidth Full 128-bit floating point color precision 12-bit subpixel precision 65,536 fragment instruction 65,536 vertex instruction 3D volumetric textures Single-system powerwall Hardware accelerated antialiased points & lines Hardware OpenGL® overlay planes Hardware accelerated two-sided lighting Hardware accelerated clipping planes Hardware two-sided lighting 3rd-generation occlusion culling OpenGL quad-buffered stereo Hardware-Accelerated Pixel Read-Back
<b>Shading Architecture</b>	16 textures per pixel in fragment programs Window ID clipping functionality Hardware accelerated line stippling Fully programmable GPU (OpenGL2.0/DirectX 9.0c class) Long fragment programs (up to 65,536 instructions) Long vertex programs (up to 65,536 instructions) Looping and subroutines (up to 256 loops per vertex program) Dynamic flow control Conditional execution
<b>High-level Shader Languages</b>	Optimized compiler for Cg and Microsoft® HLSL OpenGL 2.0 and DirectX 9.0c support Open source compiler
<b>High-resolution Antialiasing</b>	12-bit subpixel sampling precision enhances AA quality Rotated-grid full-scene antialiasing (RG FSAA) 16x FSAA dramatically reduces visual aliasing artifacts or "jaggies" at resolution up to 1920x1200
<b>Display Resolution Support</b>	Dual Dual Link DVI-I output-drives digital displays at resolutions up to 2560 x 1600 @ 60Hz Internal 400 MHz DACs – Two analog displays up to 2560x1600 @ 60 Hz
<b>nView Architecture</b>	Advanced multi-display desktop & application management seamlessly integrated into Microsoft Windows®.
<b>Supported Graphics APIs</b>	OpenGL 2.0 ICD with immediate mode support for all OGL primitive types, DirectX 10 compatible
<b>Available Graphics drivers</b>	Microsoft Windows XP Professional, Linux - Full Open GL implementation, complete with NVIDIA and ARB extensions. HP qualified drivers may be preloaded or available from the HP support web site: <a href="http://welcome.hp.com/country/us/eng/software_drivers.html">http://welcome.hp.com/country/us/eng/software_drivers.html</a>

### Technical Specifications - Monitors

HP L1965 19-inch LCD Panel  
Monitor

<b>Type</b>	Active matrix, thin film transistor (TFT)
<b>Viewable Image Area</b> (diagonal)	19 inches; 48.25 cm maximum viewable
<b>Screen Opening (WxH)</b>	14.9 x 12.0 inches; 38.0 x 30.5 cm
<b>Viewing Angle</b> (typical)	178 degrees horizontal/178 degrees vertical (10:1 minimum contrast ratio)
<b>Brightness</b> (typical)	300 nits (cd/m <sup>2</sup> )
<b>Contrast Ratio</b> (typical)	1000:1 (typical)
<b>Response Rate</b> (typical)	6 ms (typical gray to gray)**
<b>Pixel Pitch</b>	0.294 mm
<b>Backlight Lamp Life</b> (to half brightness)	50K hours

\* All performance specifications represent the typical specifications provided by HP's component manufacturers; actual performance may vary either higher or lower.

\*\* 20 ms rise and fall

#### Video/Other Inputs

<b>Plug and Play</b>	Yes (supports VESA DDC2B and DDC/CI; PC2001 compliant)
<b>Self Powered USB 2.0 Hub</b>	One upstream, four downstream ports (cable included)
<b>Input Signal</b>	Two DVI-I connectors (VGA analog or digital)
<b>Input Impedance</b>	75 ohms ± 2%
<b>Sync Input</b>	Separate sync (HSYNC/VSYNC); composite sync, Sync on Green (activated through on-screen display)

#### Signal Interface/ Performance

<b>Video Cable</b>	One DVI-D to DVI-D, and 1 DVI-I to VGA cables
<b>Video Cable Length</b>	71 in (1.8 m)
<b>Horizontal Frequency</b>	24 to 83 kHz
<b>Vertical Frequency</b>	48 to 76 Hz
<b>Native Resolution</b>	1280 x 1024 @ 75 Hz analog 1280 x 1024 @ 60 Hz digital
<b>Maximum Resolution</b> (Analog)	1280 x 1024 @ 75 Hz analog
<b>Maximum Resolution</b> (Digital)	1280 x 1024 @ 75 Hz analog
<b>Preset VESA Graphic Modes</b> (non-interlaced)	640 x 480 @ 60 Hz, 72 Hz, 75 Hz 720 x 400 @ 70 Hz 800 x 600 @ 60 Hz, 72 Hz, 75 Hz 1024 x 768 @ 60 Hz, 70 Hz, 75 Hz 1280 x 1024 @ 60 Hz, 75 Hz
<b>Preset MAC Mode</b>	832 x 624 @ 75 Hz 1152 x 870 @ 75 Hz
<b>Preset VGA Mode</b>	640 x 480 @ 60 Hz, 72 Hz
<b>Preset SUN Mode</b>	1152 x 900 @ 76 Hz

## Technical Specifications - Monitors

	<b>Fail Safe Mode</b>	Yes (limits out of range signal messages)
	<b>Maximum Pixel Clock Speed</b>	140 MHz
	<b>User Programmable Modes</b>	Yes, 15
	<b>Anti-Glare</b>	Yes
	<b>Anti-Static</b>	Yes
	<b>AssetControl</b>	Yes (accessible on HP Compaq Business Desktops featuring Intelligent Manageability)
	<b>Default Color Temperature</b>	Yes (6500k, 9300k, sRGB, Custom User)
<b>On Screen Display (OSD) Controls</b>	<b>Buttons or Switches</b>	Power on/off; 3-button OSD; second level OSD buttons include dual-input switch, dedicated auto adjust switch
	<b>Languages</b>	English, Spanish, French, German, Netherlands, Italian, Japanese, Simplified Chinese
	<b>User Controls</b>	Size and Positioning Contrast Brightness Clock, Clock Phase Selectable Color Temperature Serial Number Mode Displayed Sleep Timer Input Selection Factory Reset
<b>Power</b>	<b>Power Supply</b>	Auto-ranging, 90 to 265 VAC; internal power supply
	<b>Input Power</b>	100 ~ 240 VAC
	<b>Nominal Current</b>	1.5 A maximum
	<b>Frequency</b>	50 ~ 60 Hz
	<b>Typical Power Consumption</b>	< 35 watts
	<b>Maximum</b>	< 55 watts
	<b>Power Saving Off Mode</b>	< 2 watts
		0 watts (when master power switch is in the off position)
	<b>Power Cable Length</b>	74.8 in (1.9 m); non-captive
<b>Mechanical</b>	<b>Dimensions (H x W x D)</b>	<b>Unpacked with stand</b> 14.85 min to 18.79 max x 15.9 x 8.78 inches (37.72 min to 47.72 max x 40.39 x 22.29 cm)
		<b>Base Area (Footprint D x W)</b> 8.78 x 11.88 inches (22.29 x 30.18 cm)

## Technical Specifications - Monitors

	<b>Panel only</b> (without stand)	12.96 x 15.9 x 2.4 inches (32.91 x 40.39 x 6.1 cm)
<b>Weight</b>	<b>Unpacked with stand</b>	15.6 lbs (7.06 kg)
	<b>Unpacked without stand</b>	9.26 lbs (4.19 kg)
	<b>Packaged</b>	20.5 lbs (9.27 kg)
<b>Bezel Width</b>	12.5 mm left and right, 12.75 mm top and bottom	
<b>Tilt Range</b>	-4 degrees to +30 degrees	
<b>Swivel Range</b>	± 45 degrees horizontal swivel	
<b>Height Adjustable</b>	Yes (4 in/100mm adjustment range)	
<b>Pivot Rotation</b>	Yes, 90 degrees	
<b>Base</b>	Ships attached and is removable	
<b>Environmental</b>	<b>Temperature – Operating</b>	41° to 95° F (5° to 35° C)
	<b>Temperature – Non-operating</b>	-4° to 140° F (-20° to 60° C)
	<b>Humidity – Operating</b>	20% to 80%
	<b>Humidity – Non-operating</b>	5% to 95%
	<b>Altitude – Operating</b>	0 to 12,000 ft (0 to 3,658 m)
	<b>Altitude – Non-operating</b>	0 to 40,000 ft (0 to 12,192 m)
<b>Environmental Data</b>	<b>Eco-Label Certifications and Declarations</b>	This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:

- CECP

Energy Consumption (in accordance with US Energy Star test method)	AC Input Voltage at 100 VAC +/- 5 VAC, 50 Hz +/- 3 Hz	AC Input Voltage at 115 VAC +/- 5 VAC, 60 Hz +/- 3 Hz	AC Input Voltage at 230 VAC +/- 5 VAC, 50 Hz +/- 3 Hz
Normal Operation	35.7 watts	35.6 watts	35.1 watts
Sleep	1.08 watts	1.14watts	1.23 watts
Off	0.93 watts	0.94 watts	0.92 watts
<b>Heat Dissipation*</b>	100 VAC, 50 Hz	115 VAC, 60 Hz	230 VAC, 50 Hz
Normal Operation	121.7 BTU/hr	121.4 BTU/hr	119.7 BTU/hr
Sleep	3.68 BTU/hr	3.89 BTU/hr	4.19 BTU/hr
Off	3.17 BTU/hr	3.21 BTU/hr	3.14 BTU/hr

\*NOTE: Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.

**Longevity and Upgrading** Upgradeability features contained in the product include:

One upstream and four downstream USB ports

**Ergonomics**

The monitor meets the ergonomic requirement of EN-ISO 13406-2 for flat panel displays.

**Additional Information**

This product is in compliance with the Restrictions of Hazardous Substances (RoHS) Directive,

2002/95/EC.

This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive, 2002/96/EC.

Plastics parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO1043.

Display meets the requirement for low frequency electromagnetic fields per MPR-II, TCO, and prEN50279 A/B/C.

This product contains 100% recycled materials (by wt.)

This product is 100% recyclable when properly disposed of at end of life.

#### Packaging Materials

- Corrugated - 0.955 kg
- Plastic (other) - 0.055 kg
- Polystyrene - 0.24 kg

#### Material Usage

This product does not contain any of the following substances in excess of regulatory limits (refer to the HP General Specification for the Environment at

[http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen\\_specifications.html](http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen_specifications.html)):

- Asbestos
- Certain Azo Colorants
- Certain Brominated Flame Retardants - may not be used as flame retardants in plastics
- Cadmium
- Chlorinated Hydrocarbons
- Chlorinated Paraffins
- Formaldehyde
- Halogenated Diphenyl Methanes
- Lead carbonates and sulfates
- Lead and Lead compounds
- Mercuric Oxide Batteries
- Nickel - finishes must not be used on the external surface designed to be frequently handled or carried by the user.
- Ozone Depleting Substances
- Polybrominated Biphenyls (PBBs)
- Polybrominated Biphenyl Ethers (PBBEs)
- Polybrominated Biphenyl Oxides (PBBOs)
- Polychlorinated Biphenyl (PCB)
- Polychlorinated Terphenyls (PCT)
- Polyvinyl Chloride (PVC) - except for wires

		and cables, and certain retail packaging has been voluntarily removed from most applications.
		<ul style="list-style-type: none"><li>● Radioactive Substances</li><li>● Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)</li></ul>
	<b>Packaging</b>	HP follows these guidelines to decrease the environmental impact of product packaging: <ul style="list-style-type: none"><li>● Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.</li><li>● Eliminate the use of ozone-depleting substances (ODS) in packaging materials.</li><li>● Design packaging materials for ease of disassembly.</li><li>● Maximize the use of post-consumer recycled content materials in packaging materials.</li><li>● Use readily recyclable packaging materials such as paper and corrugated materials.</li><li>● Reduce size and weight of packages to improve transportation fuel efficiency.</li><li>● Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.</li></ul>
	<b>End-of-life Management and Recycling</b>	Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: <a href="http://www.hp.com/recycle">http://www.hp.com/recycle</a> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.
	<b>Hewlett-Packard Corporate Environmental Information</b>	For more information about HP's commitment to the environment: Global Citizenship Report <a href="http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html">http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html</a> Eco-label certifications <a href="http://www.hp.com/hpinfo/globalcitizenship/environment/productdesign/ecolabels.html">http://www.hp.com/hpinfo/globalcitizenship/environment/productdesign/ecolabels.html</a> ISO 14001 certificates: <a href="http://www.hp.com/hpinfo/globalcitizenship/environment/operations/envmanagement.html">http://www.hp.com/hpinfo/globalcitizenship/environment/operations/envmanagement.html</a>
<b>Options</b>	<b>HP Silver Flat Panel Speaker Bar</b>	Powered directly by the monitor or PC, seamlessly attaches to the monitor's bezel to bring full multimedia support to select HP flat panel monitors. Features include dual speakers with full sound range and external jack for headphones. Sold separately, part number EE418AA. For more information, refer to the HP Flat Panel Speaker Bar QuickSpecs.

### Technical Specifications - Monitors

<b>Other</b>	<b>Accessories Included</b>	One DVI-D to DVI-D cable, one DVI-I to VGA cable, one USB cable, and CD-ROM with Pivot Pro software, HP Display Assistant software, and HP Display LiteSaver software.
	<b>Software</b>	<p>Pivot Pro software from Portrait Displays, Inc. interacts with your PC's native graphics driver to enable seamless portrait screen redraws with a simple mouse-click or keyboard command. Pivot Pro supports 90-degree portrait and landscape views. Language support is available in English, Japanese, French, German, Spanish, Italian, and Traditional and Simplified Chinese.</p> <p>HP Display Assistant is a software utility that allows monitor adjustment, color calibration, and security/asset management using the Display Data Channel Command Interface (DDC/CI) protocol of the connected desktop PC.</p> <p>HP Display LiteSaver feature allows you to schedule Sleep mode at preset times to help protect the monitor against image retention, drastically lower power consumption and energy costs, and extend the lifespan of the monitor.</p>
	<b>User Guide Languages</b>	English, Bahasa, B. Portuguese, French, LA Spanish, Korean, Simplified Chinese, Traditional Chinese, Japanese, Danish, Dutch, Finnish, German, Italian, Norwegian, Swedish, Greek, Polish, Russian, Slovenian, Turkish
	<b>Warranty Languages</b>	English
	<b>Color</b>	Carbonite, two-tone carbonite and silver (EMEA only)
	<b>VESA Mounting</b>	Yes (swing arm/wall mount not included); base must be removed for mounting options)
	<b>VESA External Mounting</b>	Yes (standard 4 hole pattern, 100 mm)
	<b>Kensington Lock-ready</b>	Yes
<b>Certification and Compliance</b>		Australian ACA Approval, Canadian Requirements/CSA, CE Marking, China CCIB/CCEE Approval, CISPR Requirements, Eastern European Approvals, FCC Approval, German Ergonomic (TUV and GS Mark), ISO 13406-2 Compliant (Pixel Defect Guidelines), Mexican NOM Approval, MPR-II Compliant, PC2001 Compliant, PC99 Certified, S. Korean MIC Approval, Taiwan BSMI Approval, TCO 99 or 03 depending on region (emissions, ergonomics, environment), TUV-Ergo, UL Listed, VCCI Approvals, Microsoft® Windows® Certification
<b>Compatibility</b>		VESA Video Signal Standard (VSIS) Compliant video cards have been tested and proven compatible for use with the HP LP1965 Flat Panel Monitor. Recommended for use with HP products.
<b>Service and Warranty</b>		Three years parts, labor, and on-site service. 24-hour, 90-day, toll-free technical support. Replacement options may include second business day on-site service, or next business day direct replacement, at HP's sole discretion. With direct replacement, HP will ship a replacement display product directly to

### Technical Specifications - Monitors

you. Using the prepaid shipping labels provided, return your failed display to HP in the same packaging as the replacement. Certain restrictions and exclusions apply. For details see your product warranty or contact HP Customer Support.

#### HP LP2065 20-inch LCD Panel Monitor

<b>Type</b>	20-inch Active Matrix TFT (thin film transistor)
<b>Viewable Image Area (diagonal)</b>	20.1 in (51 cm)
<b>Screen Opening (W x H)</b>	16.2 x 12.17 inches; 41.1 x 30.9 cm
<b>Viewing Angle (typical)*</b>	Up to 178° horizontal/178° vertical (10:1 minimum contrast ratio)
<b>Brightness (typical)*</b>	Up to 300 nits (cd/m <sup>2</sup> )
<b>Contrast Ratio (typical)*</b>	Up to 800:1
<b>Response Rate (typical)*</b>	8 ms (gray to gray), 16 ms (rise + fall)
<b>Pixel Pitch</b>	0.255 mm
<b>Backlight Lamp Life (to half brightness)</b>	45K hours
<b>On Screen Display (OSD) Controls</b>	<b>Buttons or Switches</b> Input select, auto adjust/OSD up, OSD down, OSD menu select, power  <b>Languages</b> English, French, German, Spanish, Italian, Dutch, and Japanese  <b>User Controls</b> Brightness, contrast, positioning, color temperature, individual color control, serial number display, full screen resolutions, clock, clock phase, input selection, image control (including scaling), and factory reset
<b>Signal Interface/Performance</b>	<b>Horizontal Frequency</b> 30 to 94 kHz (VGA input); 30 to 92 KHz (DVI input for modes with pixel clock less than 157 MHz)  <b>Vertical Frequency</b> 48 to 85 Hz (VGA input); 30 to 92 KHz (DVI input for modes with pixel clock less than 157 MHz)  <b>Native Resolution</b> 1600 x 1200 @ 60 Hz (recommended) <b>Preset VESA Graphic Modes (non-interlaced)</b> 1600 x 1200 @ 60 Hz, 75 Hz (VGA input) 1280 x 1024 @ 60 Hz, 75 Hz, 85 Hz 1280 x 960 @ 60 Hz 1152 x 900 @ 66 Hz 1024 x 768 @ 60 Hz, 75 Hz, 85 Hz 800 x 600 @ 60 Hz, 85 Hz 640 x 480 @ 60 Hz, 75 Hz, 85 Hz  <b>Text Mode</b> 720 x 400 @ 70 Hz <b>Mac Mode</b> 1152 x 870 @ 75 Hz and 832 x 624 @ 75 Hz <b>Sun Mode</b> 1152 x 900 @ 66 Hz



### Technical Specifications - Monitors

	Maximum Pixel Clock Speed	202 MHz (VGA input); 162 MHz (DVI input)
	User Programmable Modes	Yes, 10
	Anti-Glare	Yes
	Anti-Static	Yes
	Default Color Temperature	6500 K
Video Input	Plug and Play	Yes
	Input Signal	Four connectors, including one 15-pin mini D-sub VGA, one DVI-I (VGA analog and digital input), one composite video, and one s-video
	Self Powered USB 2.0 Hub	One upstream, four downstream ports (cable included)
	Input Signal	Two DVI-I connectors (dual VGA analog or dual digital input possible)
	Input Impedance	75 ohms $\pm$ 10%
	Sync Input	Separate sync (HSYNC/VSYNC); composite sync, Sync on Green
	Video Cable	Two VGA to DVI-I; two DVI-D to DVI-I
	Video Cable Length	5.9 ft (1.8 m)
Power	Input Power	Auto-Ranging, 90 to 132 VAC and 195 to 265 VAC; internal power supply, 50 Hz/60 Hz
	Frequency	47.5 to 63 Hz
	Typical Power Consumption	55 watts (without USB ports); 70 watts (USB ports fully loaded)
	Maximum	< 75 W
	Power Saving	< 2 watts
	Power Cable Length	5.9 ft (1.8 m)
Mechanical	Dimensions (H x W x D)	<b>Unpacked with stand</b> 16.7 to 21.8 x 17.4 x 8.67 inches; 42.5 to 55.5 x 44.3 x 22.0 cm  <b>Unpacked w/o stand (head only)</b> 13.58 x 17.4 x 3.42 inches; 34.5 x 44.3 x 8.7 cm  <b>Packaged</b> 11.77 x 22.2 x 16.77 inches; 29.9 x 56.4 x 42.6 cm
	Weight	<b>Unpacked</b> With stand: 20.28 lb (9.2 kg); Without stand: 12.35 lb (5.6 kg)  <b>Packaged</b> 26.3 lb (11.95 kg)
	Tilt Range	-5° to + 25° vertical tilt
	Swivel Range	-45° to + 45°

### Technical Specifications - Monitors

	<b>Height Adjustable</b>	Yes, range 5.1 in (13.0 cm)
	<b>Pivot Rotation</b>	Yes
	<b>Base</b>	Detachable, ships attached
<b>Environmental</b>	<b>Temperature – Operating</b>	46° to 95° F (10° to 35° C)
	<b>Temperature – Non-operating</b>	6° to 140° F (-10° to 60° C)
	<b>Humidity – Operating</b>	20% to 80% non-condensing
	<b>Humidity – Non-operating</b>	5% to 85%
	<b>Altitude – Operating</b>	+12,000 ft (+3,657.6 m)
	<b>Altitude – Non-operating</b>	+40,000 ft (+12,192 m)
<b>Options</b>	<b>HP Silver Flat Panel Speaker Bar - Part number: EE418AA</b>	Powered directly by the monitor or the PC, the Speaker Bar seamlessly attaches to the monitor's lower bezel to bring full audio support to select HP flat panel monitors. Features include dual speakers with full sound range and external jack for headphones. Sold separately. For more information, refer to the HP Silver Flat Panel Speaker Bar QuickSpec.
<b>Other</b>	<b>Accessories Included</b>	VGA to DVI-I cable – connects the graphic card's VGA connector to the monitor's input #1 or 2 (DVI-I analog) connector.  DVI-D to DVI-I cable – connects the graphic card's DVI-D digital connector to the monitor's input #1 or #2 (DVI-I digital) connector.
	<b>User Guide Languages</b>	English, B. Portuguese, French, LA Spanish, Korean, S. Chinese, T. Chinese, Bahasa, Japanese, Danish, Finnish, German, Norwegian, Spanish, Swedish, Greek, Polish, Russian, Slovenian, Turkish
	<b>Software</b>	HP Display Assistant Utility makes it possible to adjust displays settings through the PC using two-way communication via DDCI.  HP Display Lite Saver allows ability to power up and down display at predetermined hours of the day to save power and backlight life.  Pivot Pro software from Portrait Displays, Inc. interacts with your PC's native graphics driver to enable seamless portrait screen redraws with a simple mouse-click or keyboard command. Pivot Pro supports 90-degree portrait and landscape views. Language support is available in English, Japanese, French, German, Spanish, Italian, and Traditional and Simplified Chinese.
		<b>User Guide Languages</b>
	<b>Warranty Languages</b>	English
	<b>Color</b>	Carbonite/Silver

### Technical Specifications - Monitors

<b>VESA External Mounting</b>	Yes (Standard 4 hole pattern, 100 mm)
<b>Kensington Lock-Ready</b>	Yes
<b>Certification and Compliance</b>	Canadian Requirements/CSA, CE Marking, CISPR Requirements, Energy FCC Approval, ISO 13406-2 Pixel Defect Guidelines, Mexican NOM Approval,, MPR-II Compliant, PC2001 Compliant, PC99 Certified, TCO 03 (emissions, ergonomics, environment), TUV-Ergo, UL Listed, VCCI Approvals, Microsoft Windows Certification (Microsoft Windows XP)
<b>Compatibility</b>	Compatible with platforms using the VESA standard video modes. Recommended for use with HP products.
<b>Service and Warranty</b>	Three years parts, labor, and on-site service. 24-hour 365-day 1-800 technical support. Replacement options include 2nd business day on-site service or next business day direct replacement. With direct replacement, HP will ship a replacement display product directly to you. Using the shipping labels provided, return your failed display to HP. Certain restrictions and exclusions apply. For details, contact HP Customer Support.

#### HP LP2465 24-inch Widescreen LCD Monitor Panel

<b>Type</b>	24-inch Active Matrix TFT (thin film transistor)
<b>Viewable Image Area (diagonal)</b>	24 inches; 60.96 cm
<b>Screen Opening (W x H)</b>	20.47 x 12.83 inches; 52.0 x 32.6 cm
<b>Viewing Angle (typical)*</b>	178° H/ 178° V (10:1 minimum contrast ratio)
<b>Brightness (typical)*</b>	500 nits (cd/m <sup>2</sup> )
<b>Contrast Ratio (typical)*</b>	1000:1
<b>Response Rate (typical)*</b>	8 ms (typical gray to gray)
<b>Pixel Pitch</b>	0.270 mm
<b>Backlight Lamp Life (to half brightness)</b>	50K hours

\*Response time 13 ms rise and fall, 6 ms gray to gray.

<b>On Screen Display (OSD) Controls</b>	<b>Buttons or Switches</b>	Input Select, Auto Adjust, OSD Up, OSD Down, OSD Menu Select, Power
	<b>Languages</b>	English, French, German, Spanish, Italian, Japanese, Dutch
	<b>User Controls</b>	Brightness, contrast, positioning, color temperature, individual color control, serial number display, full screen resolutions, clock, clock phase, input selection (includes separate direct access key for dedicated swap between inputs 1 and 2), factory reset
<b>Signal Interface/ Performance</b>	<b>Horizontal Frequency</b>	30 to 94 kHz (VGA input); 30 to 92 KHz (DVI input) (for modes with pixel clock less than 157 MHz)
	<b>Vertical Frequency</b>	48 to 85 Hz (VGA and DVI input)
	<b>Native Resolution</b>	1920 x 1200 @ 60 Hz (recommended) (native aspect ratio of 16:10)
	<b>Preset VESA Graphic</b>	1920 x 1200 @ 60 Hz

## Technical Specifications - Monitors

	<b>Modes (non-interlaced)</b>	1600 x 1200 @ 60 Hz, 75 Hz 1280 x 1024 @ 60 Hz, 75 Hz, 85 Hz 1280 x 960 @ 60 Hz 1152 x 900 @ 66 Hz 1024 x 768 @ 60 Hz, 75 Hz, 85 Hz 800 x 600 @ 60 Hz, 75 Hz 640 x 480 @ 60 Hz, 75 Hz
	<b>Text Mode</b>	720 x 400 @ 70 Hz
	<b>Mac Mode</b>	1152 x 870 @ 75 Hz and 832 x 624 @ 75 Hz
	<b>Sun Mode</b>	1152 x 900 @ 66 Hz
	<b>Maximum Pixel Clock Speed</b>	202 MHz (VGA input); 162 MHz (DVI input)
	<b>User Programmable Modes</b>	Yes, 20
	<b>Anti-Glare</b>	Yes
	<b>Anti-Static</b>	Yes
	<b>Default Color Temperature</b>	6500 K
<b>Video/Other Inputs</b>	<b>Plug and Play</b>	Yes
	<b>Self Powered USB 2.0 Hub</b>	One upstream, four downstream ports (located on side of monitor, cable included)
	<b>Input Signal</b>	Two DVI-I (VGA analog and digital) inputs
	<b>Input Impedance</b>	75 ohms $\pm$ 10%
	<b>Sync Input</b>	Separate sync (HSYNC/VSYNC); composite sync, Sync on Green
	<b>Video Cable</b>	VGA to DVI-I; DVI-D to DVI-D
	<b>Video Cable Length</b>	5.9 ft (1.8 m)
<b>Power</b>	<b>Input Power</b>	Auto-Ranging, 90 to 132 VAC and 195 to 265 VAC; internal power supply, 50 Hz/60 Hz
	<b>Frequency</b>	47.5 to 63 Hz
	<b>Typical Power Consumption</b>	75 watts
	<b>Maximum</b>	< 110 watts
	<b>Power Saving</b>	< 2 watts
	<b>Power Cable Length</b>	6.2 ft (1.9 m)
<b>Mechanical</b>	<b>Dimensions (H x W x D)</b>	<b>Unpacked w/ stand</b> 14.6 (min) to 19.7 (max) x 22 x 9.1 in (37.1 (min) to 50.1 (max) x 55.4 x 23.2 cm)
		<b>Unpacked w/o stand (head only)</b> 14.4 x 22 x 3.7 in (36.6 x 55.84 x 9.2 cm)
		<b>Packaged</b> 11.7 x 22.1 x 25.6 in (29.8 x 56.0 x 65.1 cm)

### Technical Specifications - Monitors

	<b>Weight</b>	<b>Unpacked</b>	23.6 lbs (10.7 kg )
		<b>Packaged</b>	23.6 lbs (10.7 kg )
	<b>Tilt Range</b>	-5° to + 25° vertical	
	<b>Swivel Range</b>	-45° to + 45°	
	<b>Height Adjustable</b>	Yes, range 5.1 in (130 mm)	
	<b>Pivot Rotation</b>	Yes	
	<b>Base</b>	Detachable, ships detached	
<b>Environmental</b>	<b>Temperature – Operating</b>	46° to 95° F (10° to 35° C)	
	<b>Temperature – Non-operating</b>	6° to 140° F (-10° to 60° C)	
	<b>Humidity – Operating</b>	20% to 80% non-condensing	
	<b>Humidity – Non-operating</b>	5% to 85%	
	<b>Altitude – Operating</b>	+12,000 ft (+3,657.6 m)	
	<b>Altitude – Non-operating</b>	+40,000 ft (+12,192 m)	
<b>Other</b>	<b>Accessories Included</b>	<p>VGA to DVI-I cable – connects the graphic card's VGA connector to the monitor's input #2 (DVI-I analog) connector</p> <p>DVI-D to DVI-D cable – connects the graphic card's DVI-D digital connector to the monitor's input #2 (DVI-I digital) connector</p>	
	<b>Software</b>	<p>Pivot Pro software from Portrait Displays, Inc. interacts with your PC's native graphics driver to enable seamless portrait screen redraws with a simple mouse-click or keyboard command. Pivot Pro supports 90-degree portrait and landscape views. Language support is available in English, Japanese, French, German, Spanish, Italian, and Traditional and Simplified Chinese.</p> <p>HP Display Assistant is a software utility that allows monitor adjustment, color calibration, and security/asset management using the Display Data Channel Command Interface (DDC/CI) protocol of the connected desktop PC.</p> <p>HP Display LiteSaver feature allows you to schedule Sleep mode at preset times to help protect the monitor against image retention, drastically lower power consumption and energy costs, and extend the lifespan of the monitor.</p>	
	<b>User Guide Languages</b>	<p>English, B. Portuguese, French, LA Spanish, Korean, S. Chinese, T. Chinese, Bahasa, Japanese, Danish, Finnish, German, Norwegian, Spanish, Swedish, Greek, Polish, Russian, Slovenian, Turkish</p>	

### Technical Specifications - Monitors

	<b>Warranty Languages</b>	English, Canadian French, LA Spanish, Brazilian Portuguese, Danish, German, Castilian Spanish, French, Italian, Dutch, Norwegian, Finnish, Swedish, Bahasa Indonesian, Korean, T. Chinese, S. Chinese
	<b>Color</b>	Carbonite/silver
	<b>VESA External Mounting</b>	Yes (Standard 4 hole pattern, 100 mm)
	<b>Kensington Lock-Ready</b>	Yes
<b>Options</b>	<b>HP Silver Flat Panel Speaker Bar - Part number: EE418AA</b>	Powered directly by the monitor or PC, the Speaker Bar seamlessly attaches to the monitor's lower bezel to bring full audio support to select HP flat panel monitors. Features include dual speakers with full sound range and an external jack for headphones. Sold separately. For more information, refer to the HP Flat Panel Speaker Bar QuickSpec.
<b>Certification and Compliance</b>		Australian ACA Approval, Canadian Requirements/CSA, CE Marking, China CCIB/CCEE Approval, CISPR Requirements, Eastern European Approvals, FCC Approval, German Ergonomic (TUV and GS Mark), ISO 9241-3,7,8 VDT Guidelines, ISO 13406-2 Pixel Defect Guidelines, Mexican NOM Approval, MIC Requirements (New Zealand), MPR-II Compliant, Nordic Approvals (Nemko, Fimko, Demko, Semko), PC2001 Compliant, PC99 Certified, S. Korean MIC Approval, Taiwan BSMI Approval, TCO 03 (emissions, ergonomics, environment), TUV-Ergo, UL Listed, VCCI Approvals, Microsoft Windows Certification (Microsoft Windows 98, Microsoft Windows 2000, and Microsoft Windows XP)
<b>Compatibility</b>		Compatible with platforms using the VESA standard video modes. Recommended for use with HP products.
<b>Service and Warranty</b>		Three years parts, labor, and on-site service. 24-hour, 90-day, toll-free technical support. Replacement options may include second business day on-site service, or next business day direct replacement, at HP's sole discretion. With direct replacement, HP will ship a replacement display product directly to you. Using the prepaid shipping labels provided, return your failed display to HP in the same packaging as the replacement. Certain restrictions and exclusions apply. For details see your product warranty or contact HP Customer Support.

### Technical Specifications - Monitors

HP LP3065 Flat Panel Monitor	Panel	<b>Type</b>	30.0-inch Wide Format Active Matrix TFT (thin film transistor)
		<b>Viewable Image Area</b> (diagonal)	29.77 in (75.623 cm)
		<b>Screen Opening</b> (W x H)	25.3 x 15.8 in (64.3 x 40.3 cm)
		<b>Viewing Angle</b> (typical)*	Up to 178° H/ 178° V (10:1 minimum contrast ratio)
		<b>Brightness</b> (typical)*	300 nits (cd/m <sup>2</sup> )
		<b>Contrast Ratio</b> (typical)*	1000:1
		<b>Response Rate</b> (typical)*	12 ms (8 ms average gray to gray)
		<b>Pixel Pitch</b>	0.250 mm
		<b>Backlight Lamp Life</b> (to half brightness)	40K hours
		<b>Color Gamut</b>	92% of NTSC
	On Screen Display (OSD) Controls	<b>Buttons or Switches</b>	Input select, brightness up, brightness down, power
		<b>User Controls</b>	Brightness, input selection
	Signal Interface/ Performance	<b>Horizontal Frequency</b>	100 KHz
		<b>Vertical Frequency</b>	60 Hz
		<b>Native Resolution</b>	2560 x 1600 @ 60 Hz (native aspect ratio of 16:10)
		<b>Pixel Clock Speed</b>	275 MHz
		<b>Anti-Glare</b>	Yes
		<b>Anti-Static</b>	Yes
		<b>Default Color Temperature</b>	6500 K
		Video/Other Inputs	<b>Plug and Play</b>
	<b>Self Powered USB 2.0 Hub</b>		One upstream, four downstream ports (located on side of monitor, cable included)
	<b>Input Signal</b>		Three dual-link DVI-D inputs (Windows PC and graphics card that supports DVI ports with dual-link digital bandwidth and VESA DDC standard for plug-and-play setup requires a DVI-D dual-link graphic card that supports WQXGA (2560 x 1600) resolution.)
		<b>Video Cable</b>	Two dual-link DVI cables
		<b>Video Cable Length</b>	5.9 ft (1.8 m)
	Power	<b>Input Power</b>	Auto-Ranging, 100 to 240 VAC; internal power supply, 50 Hz/60 Hz
		<b>Typical Power Consumption</b>	118 watts
		<b>Maximum</b>	< 176 watts

### Technical Specifications - Monitors

	<b>Power Saving</b>	< 2 watts		
	<b>Power Cable Length</b>	5.9 ft (1.8 m)		
<b>Mechanical</b>	<b>Dimensions (H x W x D)</b>	<b>Unpacked w/ stand</b>	19.3 to 23.2 x 27.2 x 9.5in (49.0 to 59.0 x 69.2 x 24.0 cm)	
		<b>Unpacked w/o stand (head only)</b>	17.9 x 27.2 x 3.3 in (45.5 x 69.2 x 8.4 cm)	
		<b>Packaged</b>	22.4 x 31.1 x 14.9 in (56.8 x 79.0 x 37.8 cm)	
	<b>Weight</b>	<b>Unpacked</b>	30.6 lbs (13.9 kg)	
	<b>Tilt Range</b>	-5° to + 30° vertical		
	<b>Swivel Range</b>	-45° to + 45°		
	<b>Height Adjustable</b>	Yes, range 5.1 in (100 mm)		
	<b>Pivot Rotation</b>	No		
	<b>Base</b>	Detachable, ships detached		
<b>Environmental</b>	<b>Temperature – Operating</b>	46° to 95° F (10° to 35° C)		
	<b>Temperature – Non-operating</b>	6° to 140° F (-10° to 60° C)		
	<b>Humidity – Operating</b>	20% to 80% non-condensing		
	<b>Humidity – Non-operating</b>	5% to 85%		
	<b>Altitude – Operating</b>	+12,000 ft		
	<b>Altitude – Non-operating</b>	+40,000 ft		
<b>Environmental Data</b>	<b>Eco-Label Certifications and Declarations</b>	This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:		
		<ul style="list-style-type: none"> <li>● US Federal Energy Management Program (FEMP)</li> <li>● IT Eco Declaration</li> <li>● TCO 03</li> <li>● Taiwan Green Mark</li> <li>● CECP</li> <li>● Korea Eco-label</li> <li>● EPEAT - Silver</li> </ul>		
	<b>Energy Consumption</b> (in accordance with US Energy Star test method)	<b>AC Input Voltage at 100 VAC +/- 5 VAC, 50 Hz +/- 3 Hz</b>	<b>AC Input Voltage at 115 VAC +/- 5 VAC, 60 Hz +/- 3 Hz</b>	<b>AC Input Voltage at 230 VAC +/- 5 VAC, 50 Hz +/- 3 Hz</b>
		102.8 watts	101.7 watts	100.4watts
		2 watts <sup>1</sup>	2 watts	2 watts
		0.05 watts	0.06 watts	0.25 watts



## Technical Specifications - Monitors

<b>Heat Dissipation<sup>2</sup></b>	AC Input	AC Input	AC Input Voltage
	Voltage at 100 VAC +/- 5 VAC, 50 Hz +/- 3 Hz	Voltage at 115 VAC +/- 5 VAC, 60 Hz +/- 3 Hz	at 230 VAC +/- 5 VAC, 50 Hz +/- 3 Hz
<b>Normal Operation</b>	350.8 BTU/hr	347.0 BTU/hr	342.6 BTU/hr
<b>Sleep</b>	6.8 BTU/hr	6.8 BTU/hr	6.8 BTU/hr
<b>Off</b>	0.2 BTU/hr	0.2 BTU/hr	0.9 BTU/hr

### NOTES

<sup>1</sup>This sleep status ignore the input sync signal check cycle when metering the model in sleep mode.

<sup>2</sup>Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.

**Longevity and Upgrading** Upgradeability features contained in the product include:

One upstream and four downstream USB ports

### Ergonomics

The monitor meets the ergonomic requirement of EN-ISO 13406-2 for flat panel displays.

### Additional Information

This product is in compliance with the Restrictions of Hazardous Substances (RoHS) Directive, 2002/95/EC.

This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive, 2002/96/EC.

This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).

This product is in compliance with the IEEE 1680 (EPEAT) standard at the SILVER level, see [www.epeat.net](http://www.epeat.net).

Plastics parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO1043.

Display meets the requirement for low frequency electromagnetic fields per MPR-II, TCO, and prEN50279 A/B/C.

This product contains 0% recycled materials (by wt.)

This product is 97.6% recycleable when properly disposed of at end of life.

### Packaging Materials

- Corrugated Paper 2.19 kg
- PE-LD Bags 0.09 kg
- EPS Molded Foam 1.07 kg

### Technical Specifications - Monitors

#### RoHS Compliance

Hewlett-Packard is committed to compliance with all applicable environmental laws and regulations, including the European Union Restriction of Hazardous Substances (RoHS) Directive. HP's goal is to exceed compliance obligations by meeting the requirements of the RoHS Directive on a worldwide basis. By July 1, 2006, RoHS substances will be virtually eliminated (virtually = to levels below legal limits) for all HP electronic products subject to the RoHS Directive, except where it is widely recognized that there is no technically feasible alternative (as indicated by an exemption under the EU RoHS Directive).

#### Material Usage

This product does not contain any of the following substances in excess of regulatory limits (refer to the HP General Specification for the Environment at

[http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen\\_specifications.html](http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen_specifications.html)):

- Asbestos
- Certain Azo Colorants
- Certain Brominated Flame Retardants - may not be used as flame retardants in plastics
- Cadmium
- Chlorinated Hydrocarbons
- Chlorinated Paraffins
- Formaldehyde
- Halogenated Diphenyl Methanes
- Lead carbonates and sulfates
- Lead and Lead compounds
- Mercuric Oxide Batteries
- Nickel - finishes must not be used on the external surface designed to be frequently handled or carried by the user.
- Ozone Depleting Substances
- Polybrominated Biphenyls (PBBs)
- Polybrominated Biphenyl Ethers (PBBEs)
- Polybrominated Biphenyl Oxides (PBBOs)
- Polychlorinated Biphenyl (PCB)
- Polychlorinated Terphenyls (PCT)
- Polyvinyl Chloride (PVC) - except for wires and cables, and certain retail packaging has been voluntarily removed from most applications.
- Radioactive Substances
- Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)

#### Packaging

HP follows these guidelines to decrease the environmental impact of product packaging:

- Eliminate the use of heavy metals such as

		<p>lead, chromium, mercury and cadmium in packaging materials.</p> <ul style="list-style-type: none"><li>● Eliminate the use of ozone-depleting substances (ODS) in packaging materials.</li><li>● Design packaging materials for ease of disassembly.</li><li>● Maximize the use of post-consumer recycled content materials in packaging materials.</li><li>● Use readily recyclable packaging materials such as paper and corrugated materials.</li><li>● Reduce size and weight of packages to improve transportation fuel efficiency.</li><li>● Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.</li></ul>
	<b>End-of-life Management and Recycling</b>	<p>Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: <a href="http://www.hp.com/recycle">http://www.hp.com/recycle</a> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.</p>
	<b>Hewlett-Packard Corporate Environmental Information</b>	<p>For more information about HP's commitment to the environment:</p> <p>Global Citizenship Report <a href="http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html">http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html</a></p> <p>Eco-label certifications <a href="http://www.hp.com/hpinfo/globalcitizenship/environment/productdesign/ecolabels.html">http://www.hp.com/hpinfo/globalcitizenship/environment/productdesign/ecolabels.html</a></p> <p>ISO 14001 certificates: <a href="http://www.hp.com/hpinfo/globalcitizenship/environment/operations/envmanagement.html">http://www.hp.com/hpinfo/globalcitizenship/environment/operations/envmanagement.html</a></p>
<b>Other</b>	<b>Accessories Included</b>	<p>Two dual link DVI-D to DVI-D cables - connects the graphic card's DVI-D digital connector to the monitor's input (DVI-D digital) connectors; power cord</p>
	<b>Software</b>	<p>HP Display LiteSaver feature allows you to schedule Sleep mode at preset times to help protect the monitor against image retention, drastically lower power consumption and energy costs, and extend the lifespan of the monitor.</p>
	<b>User Guide Languages</b>	<p>English, B. Portuguese, French, LA Spanish, Korean, S. Chinese, T. Chinese, Bahasa, Japanese, Danish, Finnish, German, Norwegian, Spanish, Swedish, Greek, Polish, Russian, Slovenian, Turkish</p>

### Technical Specifications - Monitors

	<b>Warranty Languages</b>	English, Canadian French, LA Spanish, Brazilian Portuguese, Danish, German, Castilian Spanish, French, Italian, Dutch, Norwegian, Finnish, Swedish, Bahasa Indonesian, Korean, T. Chinese, S. Chinese
	<b>Color</b>	Carbonite
	<b>VESA External Mounting</b>	Yes (Standard 4 hole pattern, 100 mm)
	<b>Kensington Lock-Ready</b>	Yes
<b>Options</b>	<b>HP Flat Panel Speaker Bar - Part number: EE418AA</b>	Powered directly by the monitor or PC, the Speaker Bar seamlessly attaches to the monitor's lower bezel to bring full audio support to select HP flat panel monitors. Features include dual speakers with full sound range and an external jack for headphones. Sold separately. For more information, refer to the HP Flat Panel Speaker Bar QuickSpec.
<b>Certification and Compliance</b>		Australian ACA Approval, Canadian Requirements/CSA, CE Marking, China CCIB/CCEE Approval, CISPR Requirements, Eastern European Approvals, Compliant, FCC Approval, German Ergonomic (TUV and GS Mark), ISO 9241-3,7,8 VDT Guidelines, ISO 13406-2 Pixel Defect Guidelines, Mexican NOM Approval, MIC Requirements (New Zealand), MPR-II Compliant, Nordic Approvals (Nemko, Fimko, Demko, Semko), S. Korean MIC Approval, Taiwan BSMI Approval, TCO 99 (emissions, ergonomics, environment), TUV-Ergo, UL Listed, VCCI Approvals.
<b>Compatibility</b>		Compatible with platforms using the VESA standard video modes. Recommended for use with HP products.
<b>Service and Warranty</b>		Three years parts, labor, and on-site service. 24-hour, 90-day, toll-free technical support. Replacement options may include second business day on-site service, or next business day direct replacement, at HP's sole discretion. With direct replacement, HP will ship a replacement display product directly to you. Using the prepaid shipping labels provided, return your failed display to HP in the same packaging as the replacement. Certain restrictions and exclusions apply. For details see your product warranty or contact HP Customer Support.

© Copyright 2008 Hewlett-Packard Development Company, L.P.  
The information contained herein is subject to change without notice.

All rights reserved. Microsoft, Windows, Windows Vista, and Windows XP are registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries. Intel, the Intel logo, Pentium, and Pentium Inside are trademarks or registered trademarks of Intel Corporation or its subsidiaries in the United States and other countries. Linux is a registered trademark of Linus Torvalds in the United States and other countries.

Warranty - year(s) Protected by HP Services, including a 3 years parts, 3 years labor, and 3 years onsite service (3/3/3) standard warranty. Terms and conditions vary by country. Certain restrictions and exclusions apply.